

CUT6

6" HDMI ON-CAMERA MONITOR RECORDER


Capture Your Vision | Inspire Content Creation | Record Every Exciting Moment



-  1920x1080 FHD Resolution
-  Touch Screen
-  HDMI 2.0
-  USB2.0 Record
-  3D LUT
-  HDR
-  LUT
-  DC OUT





» USE PROFESSIONAL REC.709 COLOR CALIBRATION STANDARD

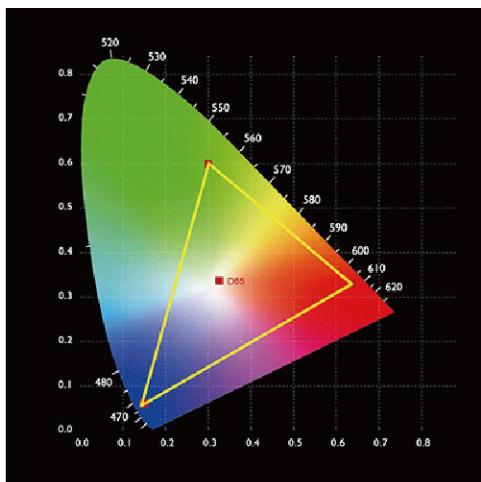



» FEATURES

- 6-inch 1920x1080 full HD IPS screen
- Touch screen menu operation, improve shooting efficiency
- New menu interface, more intuitive and intelligent
- Real-time USB2.0 recording, and support record video with LUT
- HDMI2.0 input and HDMI1.4 output, made for content creator
- HDMI supports LUT loop-out
- HDR monitoring, what you see is what you get
- Supports 3D LUT Log to REC.709 and user 3D LUT upload (up to 50)
- With Waveform, Histogram, False Color, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- Stereo Earphone output
- DC 8.4V power out to power your DSLR camera or mirrorless camera

» SMARTER TOOLS FOR ABSOLUTE PRECISION

- | | | | | | |
|--|--|---|--|---|--|
|  3D LUT |  Waveform |  Vector Scope |  Histogram |  Anamorphic Mode |  Peaking Filter |
|  False Colors |  Exposure |  Zoom-in |  Image Flip |  Embedded Audio |  Nine Grid |



Micro SD card slot import LUT/Flexible power supply mode

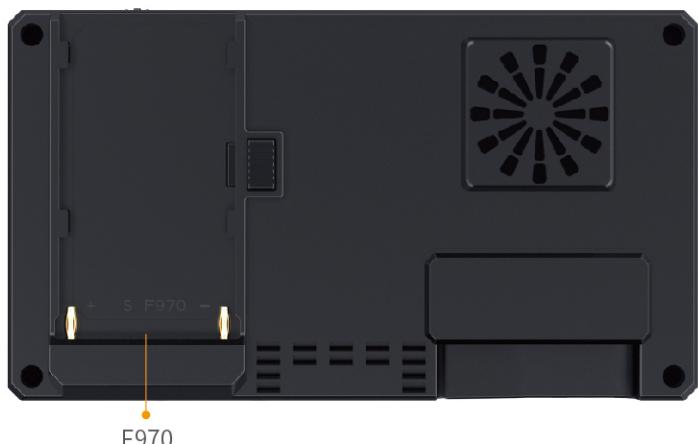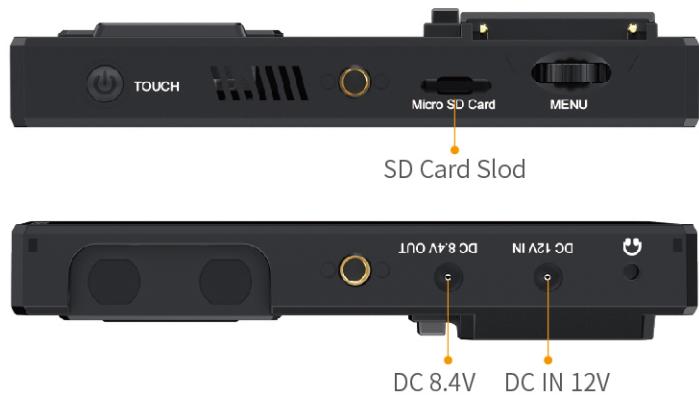

>> PARAMETER

Model	CUT6
Screen size	6" IPS
Display Colors	16.7M (8 bit)
Resolution	1920x1080 pixels
Dot pitch	0.069 (H) × 0.069 (V) (mm)
Aspect Ratio	16:9
Brightness	450cd/m2
Contrast	1000:1
Backlight	LED
Response Time	Ton+Toff=25ms
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	1*HDMI
Output	1*HDMI
Other Interface	1* USB2.0, 1* TF card slot
Power Out	DC OUT 8.4V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera)
Audio	3.5mm Stereo Headphone
HDMI2.0 Support Format	SMPTE:720p@50/60 1080i@50/60 1080p@24/30/50/60
	VESA:1024×768@60 1280×720@60 1280×768@60 1280×800@60 1280×1024@60
	1360×768@60 1366×768@60 1440×900@60 1600×1200@60 1680×1050@60
	1920×1080@60 1920×1200@60 3840×2160@60 4096×2160@60
HDMI1.4 Support Format	SMPTE:720p@50/60 1080p@24/25/30/50/60
	VESA:1024×768@60 1280×720@50/60 1280×768@60 1280×1024@60
	1360×768@60 1920×1080@24/25/30/50/60
Power Consumption	≤ 11W
Input Voltage	DC7 ~14V
Power Connector	DC
Battery Plate	F970 Battery Plate
Operating Temperature	-20°C ~ 50°C
Storage Temperature	-30°C ~ 60°C
Install Way	1/4"-20 Thread Point (Top, Right, Bottom)
Unit Size	152Lx86Hx23D (mm)
Unit Weight	230g

>> STRUCTURE

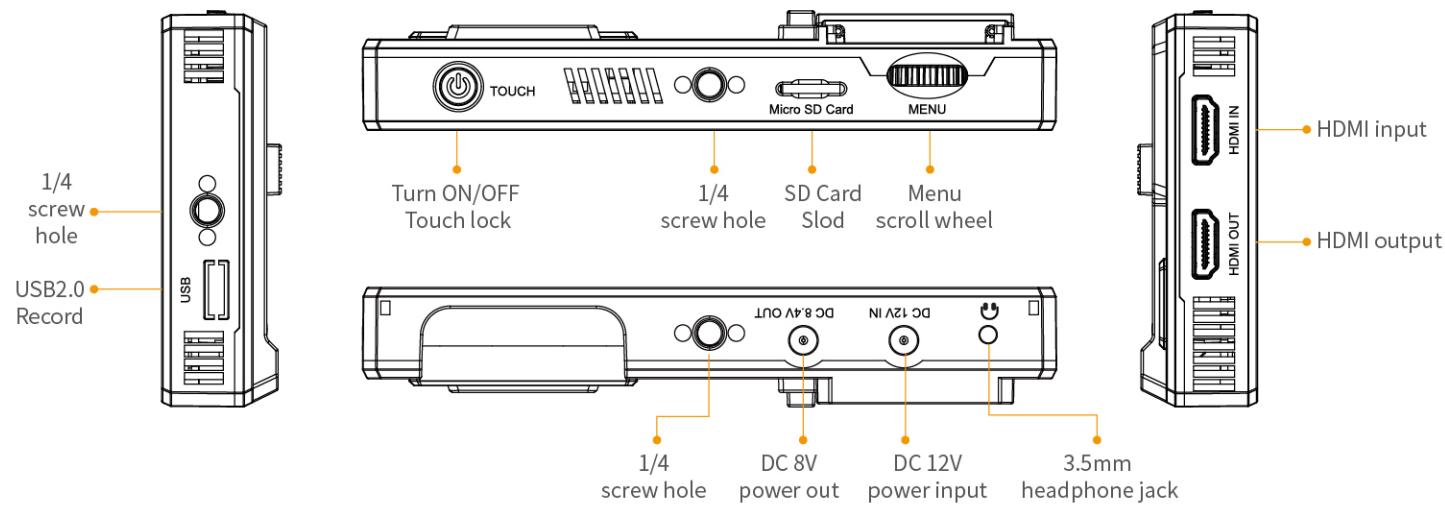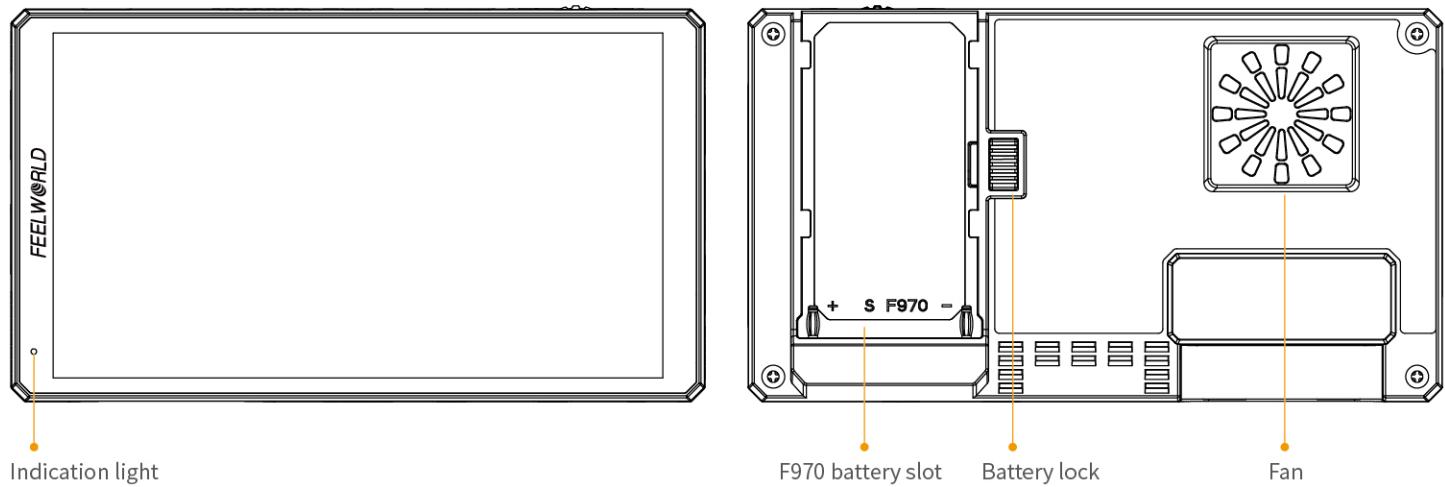

>> PACKING LIST



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2672627

Fax: +86-596-2672617

Website: www.feelworld.com.cn

www.seetec.com.cn