


# 5.5" Super Lightweight On-Camera Monitor

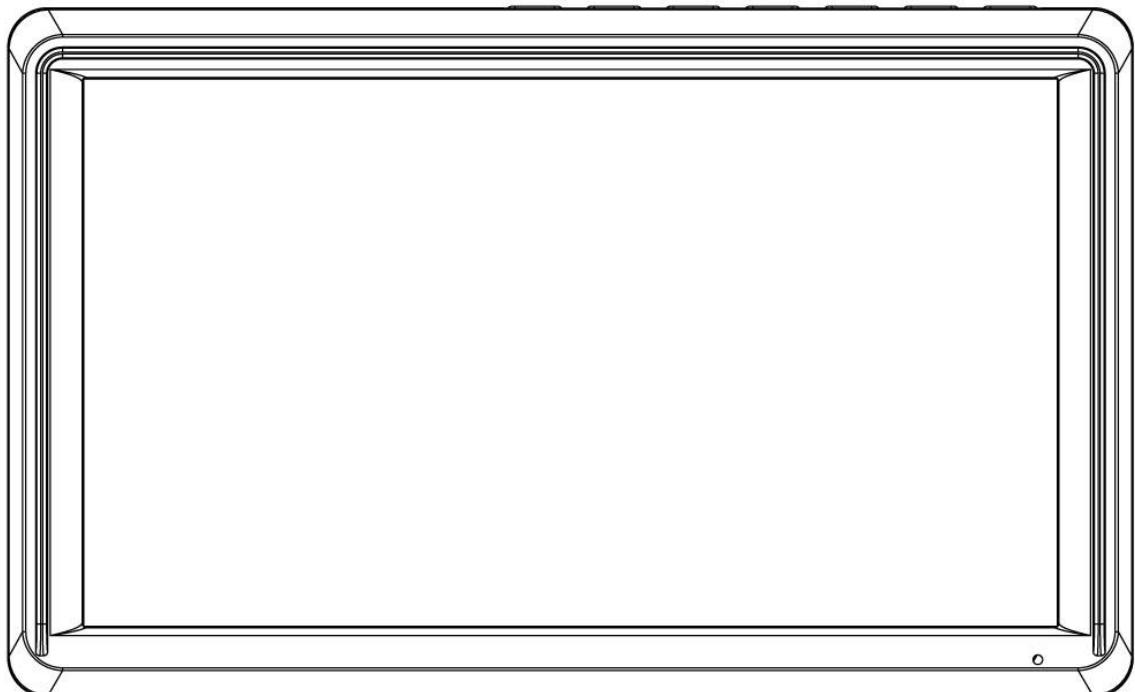

## User Manual

## Foreword

Thank you for purchasing our 5.5-inch super lightweight on-camera monitor. Please read this manual carefully before using the unit. Have a great experience!

## Cautions

- Please avoid the heavy impact and drop onto the ground when move the product.
- Please do not cover the vents and holes on the enclosure and do not place the machine on a bed, sofa, and rug to ensure good ventilation. Otherwise it will lead to overheating and reduce the service life.
- The screen of this product is made of glass. Please do not drop the screen towards the ground. Keep away from injury if the screen is broken.
- Keep the product away from the heat source, such as the radiator, the water heater, the stoves and the other heating products.
- Avoid the prolonged exposures to the sun as the LCD screen will be damaged.
- To avoid damaging the product, please do not take apart or repair the unit by yourself without the adjustable components in the unit.
- To maintain the LCD screen better, please notice the ways as below to avoid the scratch, the discoloration and the other damages.
  1. Please refrain from using the hard objects to hit the screen.
  2. Please do not force to wipe the screen.
  3. Please do not use the chemical solutions to clean the screen.
  4. Please do not spray any detergent on the screen.
  5. Please do not write on the screen directly.
  6. Please do not stick on the screen.

7. Please simply wipe with a clean soft cloth and make sure no water on the screen.
- To protect the plastic cover better, please follow these ways as below to avoid the damages;
  1. Please do not use the chemical solutions to clean the cover.
  2. Please keep away from the volatile things.
  3. Please do not clean the case hard.
  4. Please simply wipe with a clean soft cloth and make sure no water on the cover.

## Key Features


- ◆ 5.5-inch 1920x1152 full HD IPS screen
- ◆ Super lightweight ideal for gimbal
- ◆ Simple and intuitive button operation
- ◆ Supports 3D LUT Log to REC.709 and user 3D LUT upload (up to 32)
- ◆ With Waveform, Vectorscope, RGB Histogram, Focus Assist, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- ◆ Flexible power supply: DC IN 12V, NP-F & LP-E6 dual-purpose battery slot, meet the different selection.
- ◆ Stereo Earphone output
- ◆ DC 8.4V power out to power your DSLR camera or mirrorless camera

# CONTENTS


<b>1. Product Description -----</b>	<b>4</b>
1.1 Button Instruction -----	5
1.2 Port Instruction (bottom) -----	5
1.3 Port Instruction (left) -----	6
1.4 Power Supply Way -----	6
1.5 Mount Points -----	7
1.6 Sunshade -----	8
<b>2. Menu Operation Instruction -----</b>	<b>9</b>
<b>3. Menu Function Instruction -----</b>	<b>9</b>
<b>4. How to Import LUT -----</b>	<b>17</b>
<b>5. Firmware Update -----</b>	<b>18</b>
<b>6. Technical Parameters -----</b>	<b>18</b>
<b>7. Trouble Shooting -----</b>	<b>19</b>

## 1. Product Description


### ● Front Panel

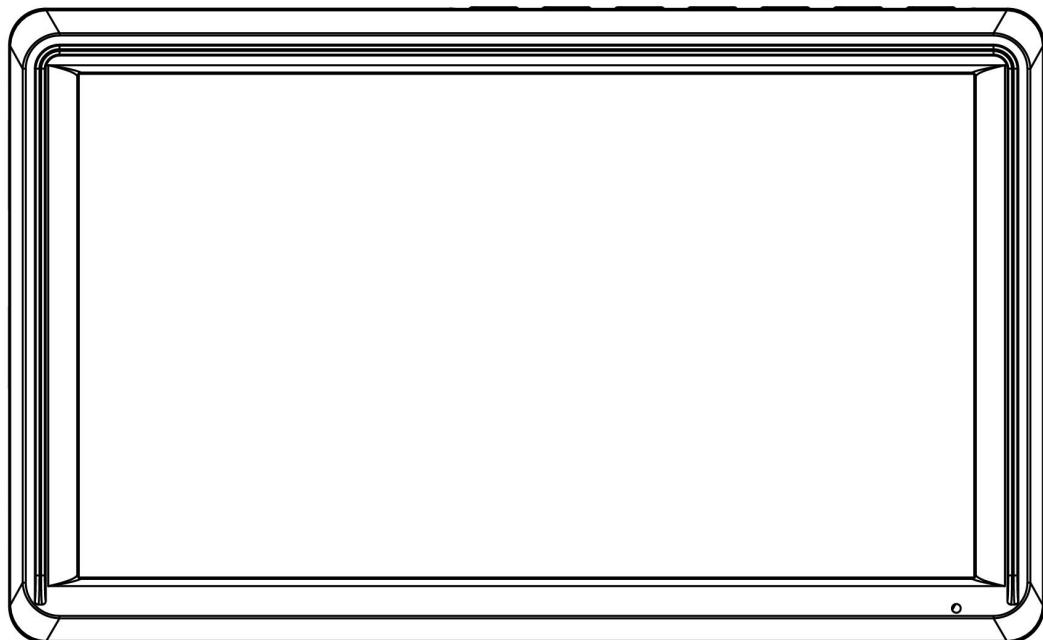

### ● Back Panel

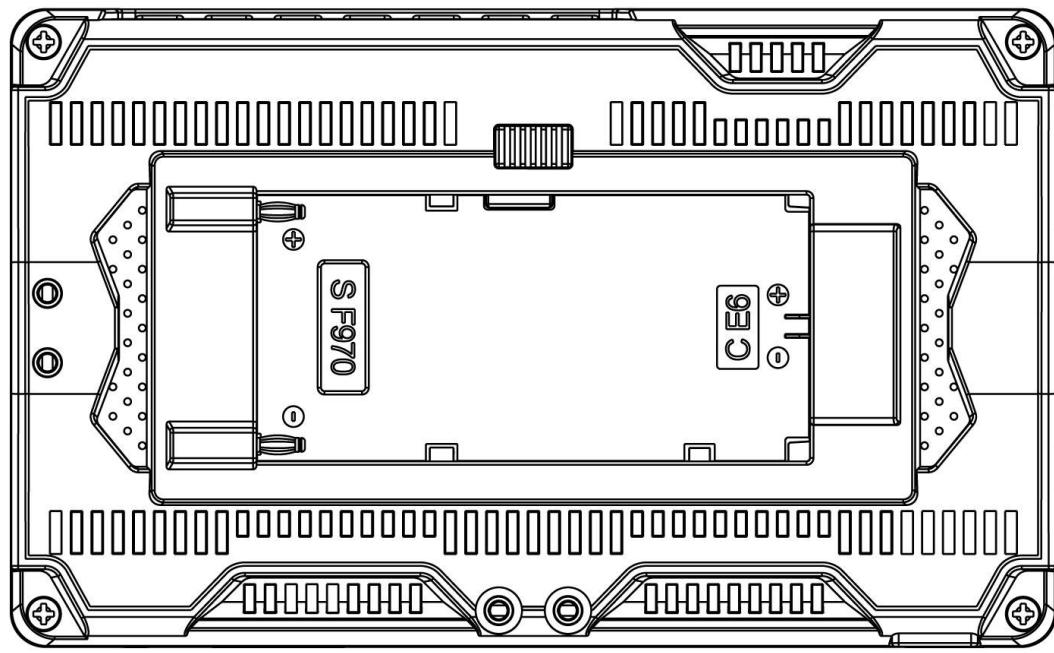


## 1.1 Button Instruction

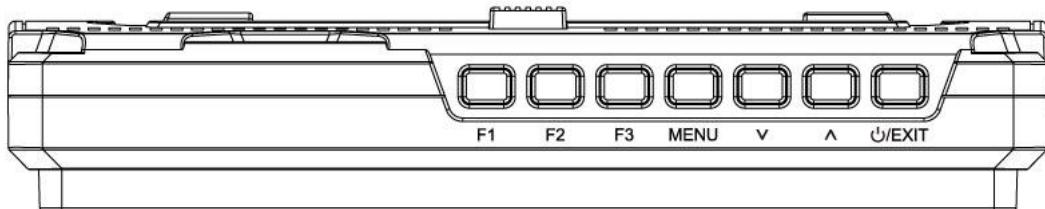

Button	Function when OSD is not displayed	Function when OSD is displayed
F1	Custom button F1	/
F2	Custom button F2	/
F3	Custom button F3	/
MENU	Display OSD Main menu	Return to previous OSD menu
V	Decrease the volume or backlight	Select next menu item; Decrease or adjust value of selected parameter
^	Increase the volume or backlight	Select previous menu item; Increase or adjust value of selected parameter
⌂/EXIT	Power On/Off button; Return/Exit Menu	

## 1.2 Port Instruction (bottom)

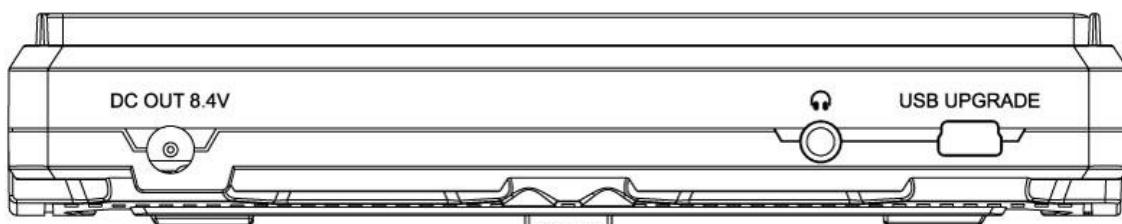

**DC OUT 8.4V:** DC power output interface, polarity as the output power




Barrel output for powering your camera with a separately available DC coupler via adaptor (like NP-FW50 Sony & LP-E6 Canon&DMW-BLF19 Panasonic).

3.5mm Earphone port output

**USB UPGRADE:** Firmware update and LUT files import.

### 1.3 Port Instruction (left)

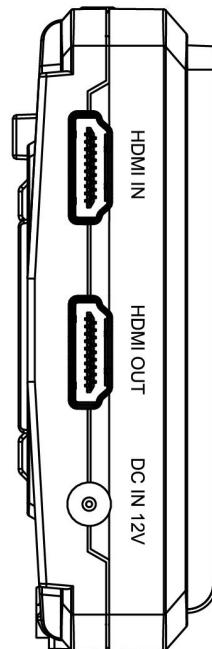

**HDMI IN:** HDMI signal input

**HDMI OUT:** HDMI signal output

**DC IN 12V:** DC power input interface, polarity as the input

power 

### 1.4 Power Supply Way

- (1) The rear cover of the monitor is equipped with F970 and E6 dual-purpose battery plate, which is applicable to F970 series of batteries and E6 series of batteries.
- (2) Barrel (5.5mm outer, 2.1mm inner) at the left side of the monitor, DC 7~24V Input.

- **Sony F970 battery plate for battery of Sony DV:**

Sony F970 F960 F950 F930 F770 F750 F730 F570 F550 F530 series

- **LP-E6 battery plate for battery of Canon DV:**

Canon LP-E6

**Remark: It is recommended to use standard original F970 batteries.**

**Different specifications of the battery have different capability. The working time for the monitor will be different. Higher capability (working time) will be longer. Please take off the battery from the monitor if you don't use the monitor in a long time.**

## 1.5 Mount Points

### (1) 1/4" Screw Lock Installation

The 1/4 screw lock can be installed on the monitor (bottom, right side).



① Fasten the 1/4" screw lock with the monitor.

② Use 2 screws to fasten the 1/4" screw lock and the monitor.

### (2) Tilt Arm Mounting

The monitor secures to your camera using the included Tilt Arm via shoe mount or 1/4"-20 thread. The Tilt Arm enables 180° of tilt for convenient monitoring at nearly any angle. A cold shoe on the Tilt

Arm lets you secure equipment (like a microphone, LED light, or wireless receiver) that would otherwise be displaced from the camera's accessory shoe.



## 1.6 Sunshade



① Velcro



② Sunshade Frame (Paste Velcro)



③ Sunshade



④ Sunshade Application

Attach the Velcro (hook side) ① to the outside of the sunshade frame of the monitor, open the sunshade ③, and align the Velcro (loop side) on the inside of the sunshade with the Velcro (hook side) ② on the monitor sunshade frame, and then complete the sunshade installation ④.

## 2. Menu Operation Instruction

After correctly connect to the power supply (red indicator), the monitor default to turn on automatically, the indicator turns Yellow, and then input HDMI signal, the indicator will turn Green from Yellow.

You can also set the power to Manually in menu System--Power setting. After setting, you need to long press  $\odot/\text{EXIT}$  to turn on the monitor when plug the power supply.

2 .1 When the menu is not displayed, directly press the " $\vee$ " or

" $\wedge$ "button to adjust the volume or backlight. You can set in the **Left**

**Right Key Set**  **of menu User Option** 

2.2. Press "**MENU**" button to enter OSD main menu, press **MENU** button again to enter secondary menu, then press " $\vee$ " or " $\wedge$ "button to select items, after selected press **MENU** button to confirm and enter function menu, press " $\vee$ " or " $\wedge$ "button to select the corresponding function or adjust the parameters.

2.3. Press  $\odot/\text{EXIT}$  button to return / exit the menu

## 3. Menu Function Instruction



**Assist**

 <b>All Waves</b>	<p><b>On, Off</b></p> <p>After turning on, waveform, vector, histogram and embedded audio will be shown.</p>
 <b>Waveform</b>	<p><b>On, Off</b></p> <p><b>Mode : RGB, YUV, Y</b></p> <p><b>Position X: 0~100</b> (moving the waveform horizontally)</p> <p><b>Position Y: 0~100</b> (moving the waveform vertically )</p> <p><b>Waves Trans. : Off, 25%, 50%, 75%</b></p> <p>This essential feature assists with the calibration of professional video cameras. It shows the overall brightness of the image assisting the video professional in correcting exposure. The waveform feature also checks the evenness of the lighting when lighting a chromakey or background.</p>
 <b>Vector</b>	<p><b>On, Off</b></p> <p><b>Position X: 0~100</b> (moving the Vector horizontally)</p> <p><b>Position Y: 0~100</b> (moving the Vector vertically )</p> <p>shows how saturated the image is and where the pixels in the image land on the color spectrum.</p>
 <b>Histogram</b>	<p><b>On, Off</b></p> <p><b>Mode: RGB1, RGB2, Y</b></p> <p><b>Position X: 0~100</b> (moving the histogram horizontally)</p> <p><b>Position Y: 0~100</b> (moving the histogram vertically )</p> <p>RGB Histogram:It can display the graphic of color tone distribution, can intuitively display the exposure status of the image, and display overlapping histograms in red, green, and blue channels</p> <p>Y Histogram: A quantitative tool to check the picture brightness, display different color for different brightness.</p>
	<p><b>On, Off</b></p> <p><b>Color : ( Red, Green, Blue )</b></p>

<b>Focus Assist</b>	<p><b>Peaking Level : you can adjust the peaking level after turning on ( 1 ~ 10 )</b></p> <p>It highlights the areas that are in focus so you are able to quickly focus the camera and not miss crucial shots.</p>
 <b>Embedded Audio</b>	<p><b>On, Off</b></p> <p><b>Position X: 0~100</b> (moving the audio level horizontally)</p> <p><b>Position Y: 0~100</b> (moving the audio level vertically )</p> <p>The Audio Level Meters provide numerical indicators and headroom levels.</p>
 <b>Zebra Pattern</b>	<p><b>On, Off</b></p> <p><b>Threshold Value : you can adjust the exposure level after turning on ( 10~100 )</b></p> <p>Areas of the image over a certain threshold are filled with a striped pattern to dramatically highlight areas where too much light is falling on the image sensor.</p>
 <b>Check Field</b>	<p><b>On, Off</b></p> <p><b>Mode : Red, Green, Blue, Mono</b></p> <p>When enabled, hue and saturation adjusted quickly and accurately</p>
 <b>False Colors</b>	<p><b>On, Off</b></p> <p><b>Mode: Normal, ARRI</b></p> <p>An image that depicts an object in colors that differ from those a photograph (a true color image) would show.</p>



 <b>Grid</b>	<p><b>On, Off</b></p> <p><b>Mode: 2x2,3x3,4x4,5x5,6x6,7x7,8x8,9x9, Custom</b></p>
---	---

	<p><b>Rows: 2~9</b></p> <p><b>Columns: 2~9</b></p> <p>When selecting <b>Custom</b>, you can custom the rows and columns of the grid</p> <p><b>Color: Red, Green, Blue, Black, White, Gray</b></p> <p>The area of the picture can be divided into 4, 9, 16, 25, 36, 49, 64, 81 equal grids.</p>
 <b>Safe Frames</b>	<p><b>On, Off</b></p> <p><b>Mode: 80%, 85%, 90%, 93%, 96%, 2.35:1, 9:16</b></p> <p><b>Color: Red, Green, Blue, Black, White, Gray</b></p>
 <b>Center Marker</b>	<p><b>On, Off</b></p> <p><b>Color : Red, Green, Blue, Black, White, Gray</b></p>
 <b>Ratio Marker</b>	<p><b>On, Off</b></p> <p><b>Mode: 4:3、13:9、14:9、15:9、16:9、1.85:1、2.35:1, 9:16</b></p> <p><b>Color: Red, Green, Blue, Black, White, Gray</b></p> <p><b>Modified Mark : 0~5</b></p>



## Image

 <b>Scan Mode</b>	<p><b>Under Scan, Over Scan</b></p>
 <b>Aspect Ratio</b>	<p><b>Auto, 16:9, 16:10, 4:3, 5:4, 1.85:1, 2.35:1, Full Screen</b></p> <p>Provides a wide variety of aspect ratio to match different camera anamorphic lenses.</p>
 	<p><b>On, Off</b></p>

<b>Anamorphic</b>	<b>Mode: 1.33X, 1.6X, 2.0X, 2.0X MAG, User</b> Under the <b>User</b> , can be customized (1.20X~2.00X) Allows you to use anamorphic lenses or adapters and see the image unsqueezed, even if your camera does not de-squeeze in camera.
 <b>Image Flip</b>	<b>On, Off</b> <b>Mode: H Flip, V Flip, H_V Flip</b>
 <b>Zoom Mode</b>	<b>On, Off</b> <b>Mode: 2X, 4X, 9X, 16X, User</b> Under the <b>User</b> , can be customized (100%~200%) It is HD signal in any part, an amplification for high quality close-up.
 <b>Image Freeze</b>	<b>On, Off</b>
 <b>P2P</b>	<b>On, Off</b> Enable the filmmaker to check the image from the 1:1 signal source without scaling. This feature is essential for capturing optimum detail.



## User Option

 <b>LUT</b>	<b>On, Off</b> After the LUT Switch is turned on, you can use the <b>Lut (SLOG2, SLOG3, LOGC, VLOG)</b> . <b>Lut Import: Confirm</b> <b>Lut Table</b> Show the 4 built-in Lut and the custom load Lut (up to 32)
---	--

	<p>The Lut item is displayed after the Lut Switch is turned on.</p> <p>LUT is a table for quickly looking up and output specific color data. By loading different 3D-LUT tables, it can quickly recombine color tone to form different color styles</p>
 <b>HDR</b>	<p><b>On, Off</b></p> <p><b>Mode: HLG1, HLG2, HLG3</b></p> <p>HDR can provide more dynamic range and the details of image, it is better to reflect the visual effects in the real environment.</p>
 <b>Display Adjustment</b>	<p><b>Backlight: 0~100</b></p> <p>Adjust the screen brightness</p> <p><b>Brightness: 0~100</b></p> <p>Adjust the image brightness</p> <p><b>Contrast: 0~100</b></p> <p>Adjustment of the ratio between the brightest and darkest parts of the image . When adjusting, pay attention to the sense of hierarchy in the image. If the proportion is too large or too small, it can cause the image to lose its colorful appearance.</p> <p><b>Saturation: 0~100</b></p> <p>Adjustment of color concentration</p> <p><b>Tint: 0~100</b></p>
 <b>Color Adjustment</b>	<p><b>Display Range: Auto, Limit, Full</b></p> <p>This feature allows for the selection of a grayscale range. The Limited grayscale range is 16-235, and the Full grayscale range is 0-255. (Grayscale represents changes in image brightness, using varying gray levels to depict brightness in different image areas. In grayscale, brightness increases from black to white, typically denoted by a numerical range from 0 to 255, where 0 signifies black and 255 indicates white, and intermediate numbers indicate varying grayscale levels.)</p>

	<p>1. If the dark part of the picture lost, the details cannot be seen clearly. For example, the input signal is in the range of 0-255, but the monitor is set Auto or Limit, the brightness of 0-15 and 236-255 is removed, resulting the dark part details unclear. You can set to Full.</p> <p>2. If the picture is gray, the black part turned gray. For example, the input signal is in the range of 16-235, but the monitor is set Full, resulting the black part turn gray. At this time, you can set to Auto or Limit.</p> <p><b>Color Temp.: 5600K, 6500K, 9300K, User</b></p> <p>Under the <b>User</b>, the red, green and blue of the image can be adjusted (0~255), made the colors of the image achieve your favorite.</p>
<p style="text-align: center;"><b>F</b></p> <p><b>Shortcut Key</b></p>	<p>All Waves, Waveform, Vector, Histogram, Embedded Audio, Center Marker, Safe Frames, Grid, Focus Assist, False Colors, Zebra Pattern, Anamorphic, Image Freeze, Check Field, Zoom Mode, Image Flip, Aspect Ratio, Ratio Marker, LUT</p> <p>To set the 3 shortcut custom button F1~F3 on the panel</p> <p>e.g.: enter the main menu, choose User Option -- <b>F</b> shortcut key -- F1 to show pop-up function items, select one of them, such as All Waves. The cursor will be changed to gray color after selected.</p> <p>Directly press F1 button of monitor panel to open All Waves</p> <p>Same setting for F2~F3</p>
<p style="text-align: center;"></p> <p><b>Left Right Key Set</b></p>	<p><b>Volume, Backlight</b></p>



## System

 <b>User Switch</b>	<p><b>User Switch: 1~4</b></p> <p>you can save the set menu as 1-4 and can be called directly next time</p>
 <b>Language</b>	<p>English, 简体中文, Español, Português, Français, Nederlands, Deutsch, 日本語, 繁體中文, 한국어로, <b>русский язык, Italiano</b></p>
 <b>OSD Option</b>	<p><b>OSD Time: Off, 15Sec, 30Sec, 45Sec</b></p> <p>Select the display time of the menu on the screen</p> <p><b>OSD Trans: Off, 25%, 50%, 75%</b></p> <p>Adjust the transparency of the menu picture background on the screen</p> <p><b>No Signal: Red, Green, Blue, Black, White, Gray</b></p> <p>Can be change the background color of screen when no signal</p>
 <b>EDID Settings</b>	<p><b>EDID Settings: 2.0, 1.4</b></p> <p>Compatible with resolution of different camera</p> <p><b>Default to 2.0 (if set 1.4 manually, then input 4K60 signal, you need to set to 2.0 again)</b></p>
 <b>Volume</b>	<p><b>On, Off</b></p> <p>0~100</p> <p>Adjusting the speaker volume</p>
 <b>Power Settings</b>	<p><b>Power on: Auto, Manual</b></p> <p>Default to Auto. If set Manual, please press EXIT/ key to turn on after the power plug in.</p>
 <b>Reset</b>	<p>Select <b>Reset</b> and press MENU button <b>Confirm</b>, the system back to original setting.</p>

 <b>Firmware Update</b>	<b>Firmware Version</b> (display the version number) <b>Firmware Update</b> <b>Confirm</b>
---	--

## 4. How to Load LUT

4.1 USB flash drive format FAT32

4.2 Max Files Limit Maximum 32 Lut files

4.3 File requirements

- The LUT file format suffix should be **.cube**
- Single file not exceeded to 7.9Mb
- Support LUT-3D-Size 16,17,32,33,64,65

Remark: LUT file name must be English or Arabic numerals

4.4 Steps for loading

4.4.1 Make sure USB flash drive correctly connect to the monitor via the accompanied Mini USB to USB cable

4.4.2 Enter main menu --LUT--Lut Import -- Confirm to load  
the monitor will auto detect the USB flash drive

If there is valid lut file in USB flash drive, the monitor will load lut files and show “[n]” name. The [n] shows the quantity number. The “name” should in lut files’ name. If load successful, the screen will show “complete[n]”. [n] Stands for the quantity number for lut files should under 32.

**PS: How to clear up the imported LUTs?**

Insert a empty USB flash drive to the monitor, enter main menu --LUT--Lut Import -- Confirm, the imported LUTs will be clear up.

## 5. Firmware Update

We usually do not recommend to upgrade casually. If really need, please connect after-sale or other person to get the relevant upgrade file

- (1). Use a FAT32 format USB drive , copy the upgrade file to the USB drive and plug it to the USB interface of the accompanied Mini USB to USB cable
- (2). Turning on the monitor, take the mini USB part of the mini USB to USB cable insert to the mini USB interface of the monitor
- (3). Enter the menu, select **System--Firmware Update--Confirm**, press MENU key to confirm to upgrade.
- (4). After loading, the monitor will shut down automatically, please reboot manually
- (5). Check whether the latest version

## 6. Technical Parameters

<b>Panel Size</b>	5.5" IPS
<b>Resolution</b>	1920x1152 pixels
<b>Dot Pitch</b>	0.0639 x 0.0213 mm
<b>Aspect Ratio</b>	16:9
<b>Brightness</b>	500cd/m <sup>2</sup>
<b>Contrast</b>	1000:1
<b>Viewing Angle</b>	80°/80°(L/R) 80°/80°(U/D)
<b>Backlight</b>	LED
<b>Signal Input</b>	HDMI
<b>Signal Output</b>	HDMI
<b>Audio</b>	3.5mm Stereo Headphone

<b>HDMI Support Format</b>	480i/576i/480p/576p 720p (60/59.94/50/30/29.97/25/24/23.98) 1080i (60/59.94/50) 1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/ 23.98sF) 3840×2160p (60/50/30/29.97/25/24/23.98)
<b>Power Input</b>	DC12 V Barrel (5.5mm outer, 2.1mm inner)
<b>Power Output</b>	DC OUT 8.4V, Barrel (5.5mm outer, 2.1mm inner)
<b>Input Voltage</b>	DC: 7~24V
<b>Power</b>	≤9W
<b>Battery Plate</b>	F970/ LP-E6 Dual-purpose Battery Plate
<b>Install Way</b>	1/4-20 mount points (bottom, right)
<b>Working</b>	-20°C~55°C
<b>Storage</b>	-30°C~65°C
<b>Unit Size</b>	142Lx87.2Hx27.5D (mm)
<b>Unit Weight</b>	175g

## 7. Trouble Shooting

### 7.1 Only black and white or monochrome picture:

- ① please check saturation, brightness & contrast adjustment.
- ② Please check "Check Field" is in black, white or monochrome image or other condition.

### 7.2 NO Image after put on the power

- ① Check if signal cable connecting is in good condition.
- ② Check signal cable connecting, and make sure to use the standard adapter to connect the monitor. If power is supplied by battery, please check if the battery is fully charged.

### 7.3 Earphone No sound

Check if Volume control do not open, press the volume button, and try to increase the volume.

- If there are still other problems, please contact with our related technologists.
- ★ As we are improving product features and product performance, so if there is any change on the specification without prior notice.