

FRM701G

DUAL 7" 12G-SDI 3RU Rackmount Monitor

Perfect 4K SDI/HDMI Monitoring Solution



>> KEY FEATURES

- Dual 7-inch full HD 1920x1200 IPS
- 3RU rack mount design, suitable for news production, post production, and broadcasting trucks, special vehicles video surveillance and other fields
- Flexible and intuitive button operation
- New menu interface, software function iconized
- Equipped with HDMI, 12G-SDI, CVBS inputs and outputs, meet different needs
- Accurate full waveform analysis and monitoring
- Custom 3D-LUT, preview filming look
- Remote control the monitor menu and functions through LAN port
- 3-color Tally indicator light, enhance the team cooperation
- Front panel stereo earphone output.

>> FLEXIBLE POWER SUPPLY



>> FULL RANGE OF AUXILIARY FUNCTIONS



3D LUT



Waveform



Vector



Histogram



Focus Assist



Embedded Audio



Over Exposure



Check Field




False Color



Time Code




Nine Grid



Safe Frames




Center Marker




Ratio Marker



Scan Mode



Aspect Ratio



Anamorphic




Image Flip



Image Freeze



Zoom



P2P


>> PARAMETERS

Model	FRM701G
Screen size	7"x2
Resolution	1920x1200 pixel
Dot pitch	26.25(H) × 3 × 78.75(V) um
Aspect Ratio	16:10
Brightness	450cd/m2
Contrast Ratio	1200:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Signal Inputs	HDMI, 12G-SDI, Audio(L/R), CVBS
Signal Outputs	HDMI, 12G-SDI, CVBS
Control Inputs	LAN
Audio	3.5mm Audio Jack
Other Interface	TYPE-C (Firmware update/ LUT import)
12G-SDI Support Format	1080i (60/59.94/50)
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/23.98)
	3840 × 2160p (23.98/24/25/29.97/30/50/59.94/60)
	4096 × 2160p (23.98/24/25/29.97/30/50/59.94/60)
HDMI Support Format	480i/576i/480p/576p
	1080i (60/59.94/50)
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/23.98)
	3840 × 2160p (60/50/30/29.97/25/24/23.98 Hz)
	4096 × 2160p (60/50/30/29.97/25/24/23.98Hz)
Power Consumption	≤26W
Input Voltage	DC 9V~24V
Power Input	DC 12V(suitable for 5.5x2.1mm power plug), 4-pin XLR
Operating Temperature	- 10°C ~ 60°C
Storage Temperature	- 30°C ~ 70°C
Install Way	Rackmount
Unit Size	482.6Lx132Hx30.5D mm
Unit Weight	1890g
Material of Body	Metal

>> PACKAGING LIST

 <p>Monitor</p>	 <p>3A Power Adapter</p>	 <p>Tally Kit</p>	 <p>USB-C to USB-A Adapter</p>	 <p>Quick Start Guide</p>
--	---	--	---	--

>> PRODUCT OVERVIEW

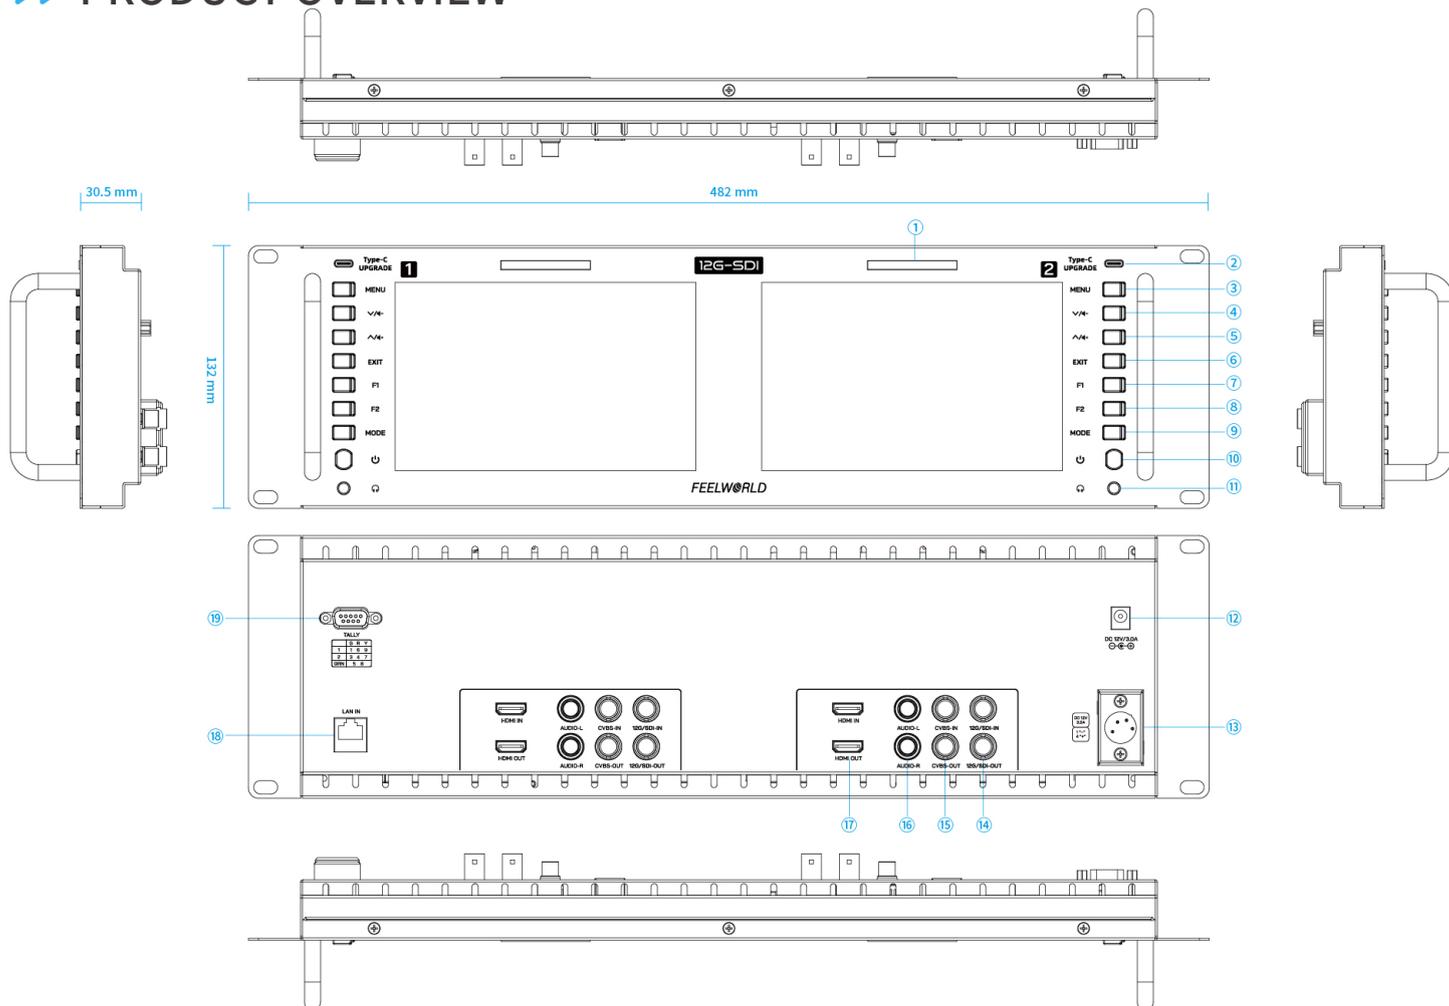

编号	功能说明		编号	功能说明	
①	/	Tally indicator	⑫	/	DC 12V Power Input
②	Type-C UPGRADE	Firmware update; LUT file import	⑬	/	4-pin XLR DC12V power input
③	MENU	Menu button, enter/confirm	⑭	12G/SDI	IN (12G-SDI single-link digital serial input) OUT (12G-SDI single-link digital serial input)
④	▼/◀	Next item selection/parameters increasing after enter the menu; Volume decrease adjustment when menu without display	⑮	CVBS	IN (Composite video broadcast signal input) OUT (Composite video broadcast signal output)
⑤	▲/▶	Previous item selection/parameters decreasing after enter the menu; Volume increasing adjustment when menu without display	⑯	AUDIO	L (Audio signal left stereo input) R (Audio signal right stereo input)
⑥	EXIT	Exit the menu	⑰	HDMI	IN (High definition multimedia interface input) OUT (High definition multimedia interface output)
⑦	F1	Custom function shortcut button	⑱	LAN IN	Ethernet LAN Connector
⑧	F2	Custom function shortcut button			
⑨	MODE	Input signal selection and confirm			
⑩	⏻	Power Switch			
⑪	🎧	Earphone jack port			



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn