

Wireless Lavalier Microphone




Small & Ultralight



Precise Noise Cancellation



Studio Audio Quality



Long Battery Life



Max 400FT LOS range



Widly Compatibility

>> KEY FEATURES

- Tiny and ultra lightweight, magnetic design easy to wear
- Precise noise cancellation capture your true sound
- Max support 120m transmission range, and 20ms low-latency
- Charging and storage integrated, auto pairing
- Built-in Stereo/Mono switchable sound track
- Compatible with multiple devices (phone, PC, camera)

>> Long Battery Life for Expanded Creation


6.5h RX Working Time	19h Charging Case
8h TX Working Time	approx.2h Charging Time

>> PARAMETERS

Description	Wireless Lavalier Microphone
Model	LM1
General	
Polar Pattern	Omnidirectional
Wireless Transmission	2.4G
Sensitivity	-40dB+2dB
Transmission Range (LOS)	Max: 400ft (120m) ; Stable: 164ft (50m)
Transmission Latency	20ms
Frequency	2402-2480MHz
Frequency Response	100-16KHz
Sound Pressure Level	110dB
Signal-to-Noise Ratio	95dB
Sampling Rate	48KHz/16BIT
Sound Track	Stereo/Mono
Compatible Device	Smartphone, Camera, PC
TX	
Battery Type	Li-ion
Battery Capacity	150mAh
Battery Voltage	3.7V
Charing Time	Approx. 2h
Working Time	Approx. 8h
Operating Temperature	0~45°C
Dimension	28*32*16.7mm
Weight	Approx. 10.5g (w/o clip magnet); Approx. 12.95g (with clip magnet)
RX	
Interface	USB-C, 3.5mm Audio Jack
Battery Type	Li-ion
Battery Capacity	150mAh
Battery Voltage	3.7V
Charing Time	Approx. 2h
Working Time	1TX to 1RX about 7.5h, 2TX to 1RX about 6.5h
Operating Temperature	0~45°C
Dimension	37.5*32*18.6mm
Weight	Approx. 12.8g
Charing Case	
Interface	USB-C
Battery Type	Li-ion
Battery Capacity	1100mAh
Battery Voltage	3.7V
Power Required	USB 5V
Charing Time	Approx. 2h
Operating Temperature	0~45°C
Charging Temperature	0~45°C
Dimension	85*59.3*38mm
Weight	Approx. 83.6g (only for charging case)
Times for the charing case charges the TX and RX	2TX and 1RX charge simultaneously, it can be charged more than 2 times with fully charged charing case


>> PRODUCT OVERVIEW

Transmitter

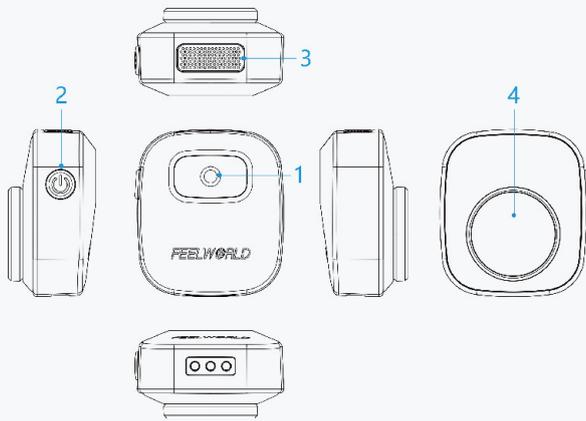

- 1. TX Status LED
- 2. Power Button
- 3. Built-in Mic
- 4. Magnet

Receiver

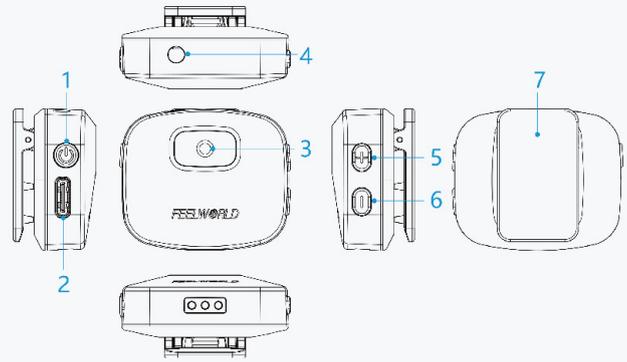

- 1. Power Button
- 2. USB-C Data Port
- 3. RX Status LED
- 4. 3.5 mm Audio Output Jack
- 5. Volume Increasing Button
- 6. Volume Decreasing Button
- 7. Clip

Charging Case



Battery Level LEDs



USB-C Charging Port

>> PACKAGING LIST

 2* Transmitter	 1*Receiver	 1*Charging Case	 1*Drawstring Bag	 2*Windscreen
 1*3.5mm TRS Cable	 1*USB-A to USB-C Charging Cable	 1*USB-C to USB-C Cable	 1*Lightning Adapter	 1*Quick Start Guide



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn