




KEY FEATURES


- FHD 1920x1080 IPS, view details with confidence
- Native 10-bit color depth, 1.07B colors, enables smooth gradations and minimizes color banding for fine image details
- Reduces reflections and fingerprints, ensuring clear visuals in bright environments
- Sensitive touch screen+ innovative and flexible knob operation to meet different needs
- 2000nit high brightness, visible in sunlight
- Rugged and durable aluminium housing
- Equipped with 4K 60Hz HDMI and 3G-SDI input and output
- Load custom 3D-LUT, preview film look
- HDR monitoring, what you see is what you get
- A full range of exposure and composition aids to empower confident filmmaking
- 3.5mm earphone output for real-time monitoring

Professional Monitoring, Powerful Tools

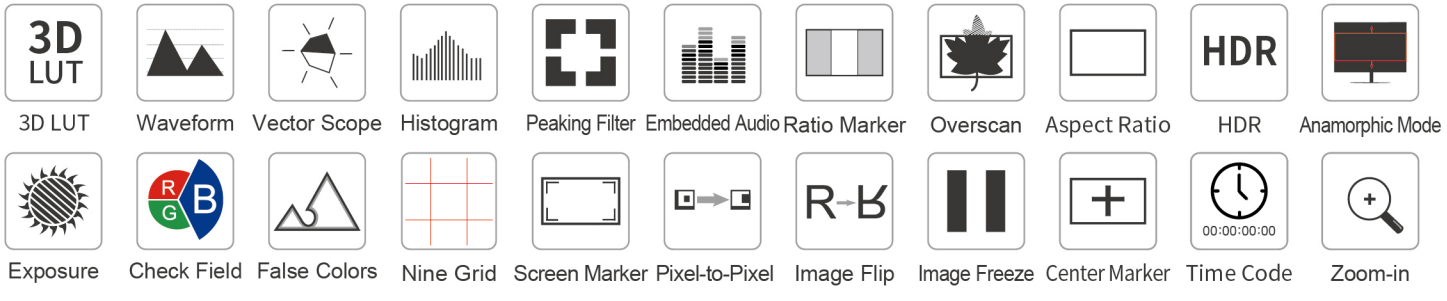

7" NATIVE 10-BIT PANEL

Richer Color, Smoother Gradients, Accurate Monitoring

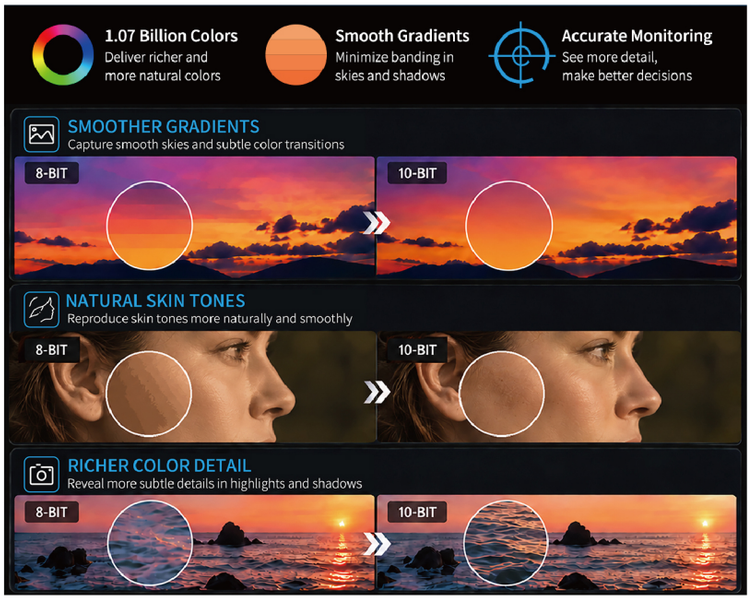

VERSATILE POWER OPTIONS





PARAMETERS

Model	SC7
Core Upgrades	Compare with SC6
	1. Native 10-bit display
	2. Added anti-glare & anti-fingerprint coating
	3. Type-C (PD) power supply "
Screen size	7" IPS (touch)
Material	Aluminium
AG+AF Coating	Haze: 10%±4%；Glossiness: ⩾70；Light transmittance: ⩾83%
Display Colors	1.07B
Color Depth	10bit
Color Gamut	97% DCI-P3
Resolution	1920x1080 pixels
Dot pitch	0.027(H) x 0.081(V) mm
Aspect Ratio	16:9
Brightness	2000cd/m2
Contrast	1500:1
Backlight	LED
Response Time	Ton+Toff=25ms
Viewing Angle	88°/88°(L/R) 88°/88°(U/D)
Signal Input	3G-SDI, HDMI 2.0
Signal Output	3G-SDI, HDMI 2.0
Power Supply Way	DC IN 12V, Barrel (5.5mm outer, 2.1mm inner);TYPE-C (PD) 20W;NP-F Battery Slot
Audio	3.5mm Stereo Headphone
SDI Input/Output Support Format	720p(60/59.94/50/30/29/25/24/23.98)
	1080i(60/59.94/50)
	1080p(60/59.94/50/30/29.97/25/24/24sF/23.98/23.98sF)
HDMI Input/ Output Support Format	480i/576i/480p/576p
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080i (60/59.94/50)
	1080p (60/59.94/50/30/29.97/25/24/23.98)
	3840×2160p (60/50/30/29.97/25/24/23.98)
	4096×2160p (60/50/30/29.97/25/24/23.98)
Power Consumption	⩽ 18W
Input Voltage	DC7 ～24V
Battery Slot	NP-F battery slot
Operating Temperature	-20°C ～ 50°C
Storage Temperature	-30°C ～ 60°C
Install Way	1/4"-20 Thread Point (Right, Left, Top, Bottom)
Whether built-in fan	Yes
Unit Size	185Lx118.6Hx27D (mm)
Unit Weight	613g

feelworld.cn

STRUCTURE

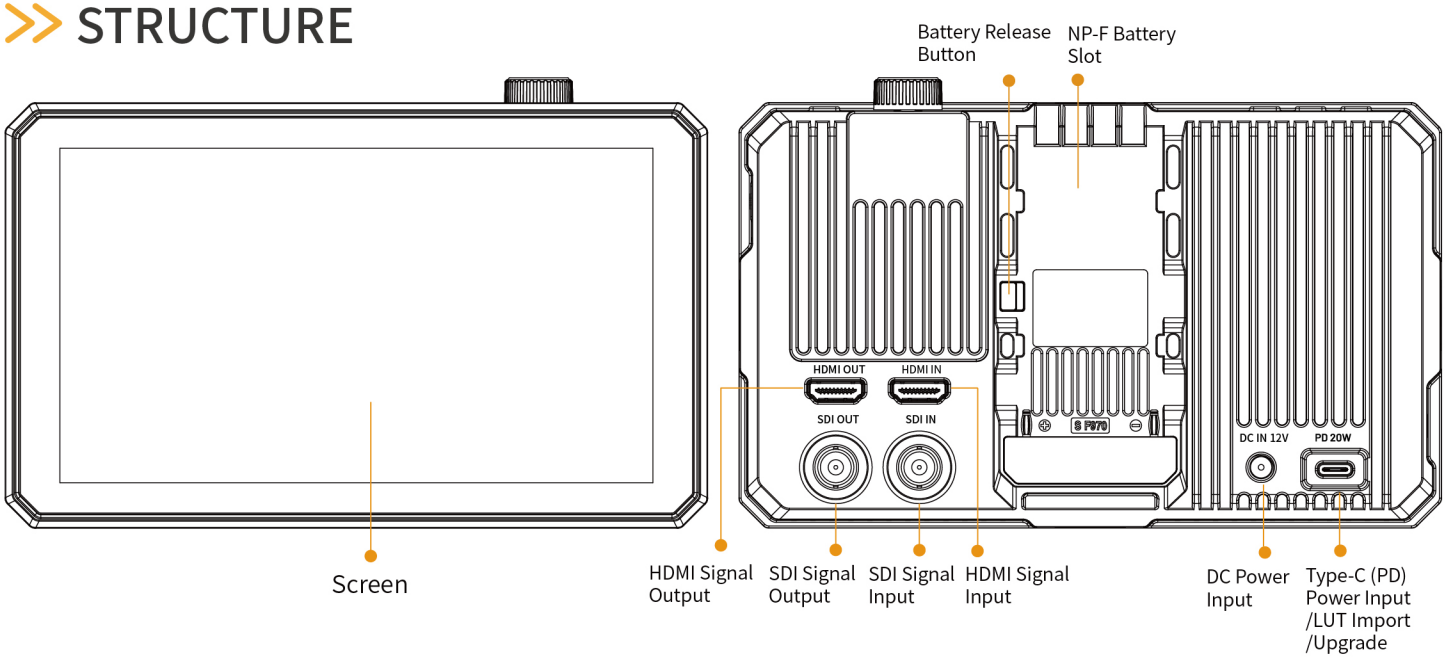

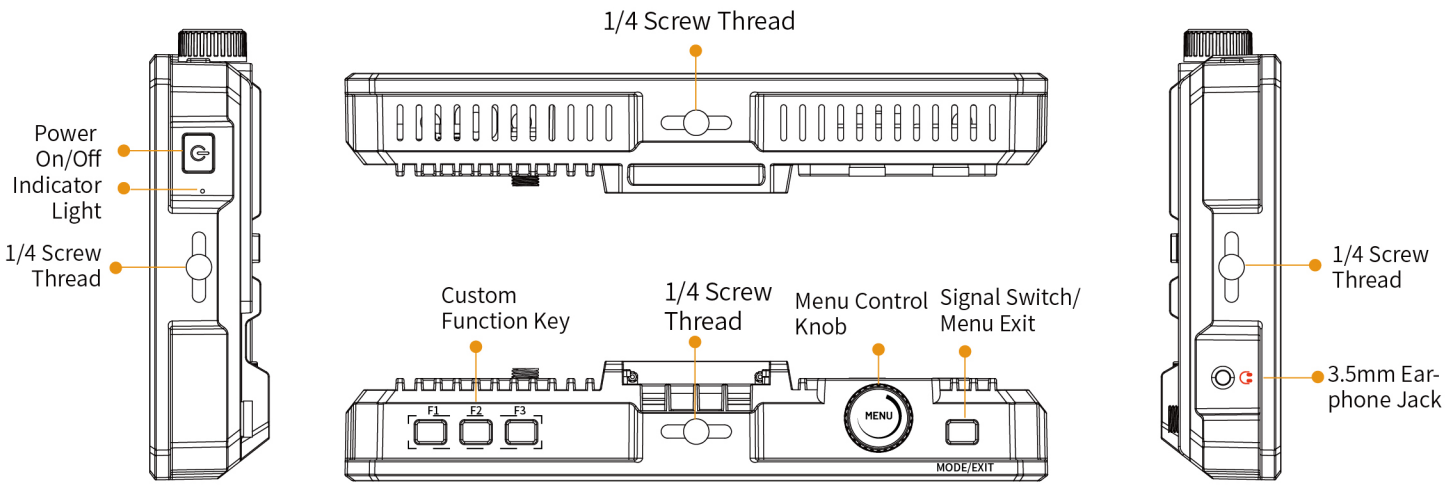

PACKAGING LIST

 Monitor	 HDMI Cable	 Micro HDMI Cable	 USB-C to USB-A Adapter
 Mini Hot Shoe Mount Hex Wrench	 Sun-hood+Frame	 Cable Management Tie	 Quick Start Guide

Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn Tel: +86-596-2182566 Website: www.feelworld.com.cn

Fax: +86-596-2672617 www.seetec.com.cn