FEELWORLD®

TP13 V2 Teleprompter



User Guide

Contents

- Cautions
- Features
- Packing List
- Installation
- Remote Controller
- APP Download
- **APP Instruction**
- Parameter
- FAQ


CAUTIONS

- Do not expose the equipment to water or corrosive liquids.
- Keep equipment away from fire source.
- It is strictly forbidden to drop or collide If there is a accidentally drop or collision that lead to damage to the coated glass, please contact the customer service to replace the glass promptly, and the corresponding cost will be charged by the customer.
- Please do not disassemble the equipment without permission. If the equipment can not be used normally caused by inadvertent disassembly, please contact the customer service and send it back to the company for repairing. Customer should cover all the corresponding costs for the repair.


FEATURES

- Optical grade beam split glass for clearer reflection
- Full metal body, sturdy and durable
- Supports camera recording; phone/tablet vertical & horizontal prompting
- Detachable & stowable light shield
- Height-adjustable gimbal for flexible shooting height adjustment
- Dedicated APP design, Bluetooth wireless control


PACKING LIST

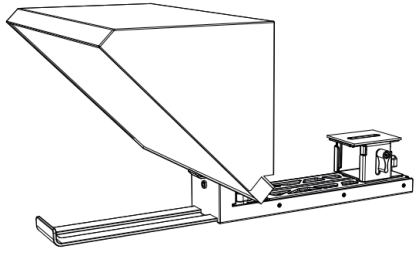

1 x Main Body

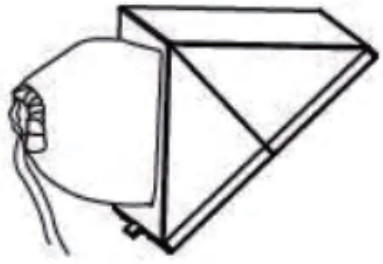


1 x Light Shield

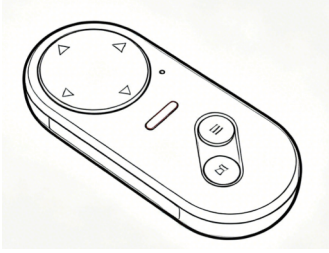

1 x Remote Controller



1 x 1/4 Camera Screw

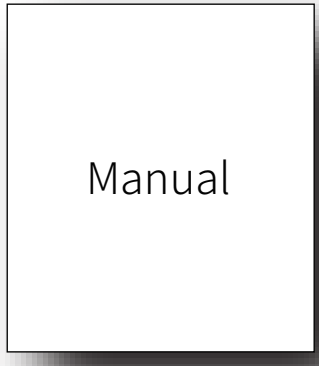

1 x User Manual

INSTALLATION



1. Use the screw that come with the tripod quick-release plate to install the tripod quick-release plate onto the teleprompter body.



3. Mount the camera onto the teleprompter using the quick-release plate.



2. Lift the glass and fix it at a 45° angle; pass the 1/4 camera screw through the quick-release plate of the gimbal



4. Loosen the red knob and slide the gimbal to adjust the camera position. Tighten the knob again after adjustment.

INSTALLATION



5. Loosen the black knob to adjust the camera height; tighten the knob again after adjustment.



6. Mount it on a tripod



7. Install the light shield onto the glass. Ensure the light shield is securely fixed to all four sides.

INSTALLATION




8. Slip it over your camera lens and tighten the elastic strap



9. Installation finished

REMOTE CONTROLLER

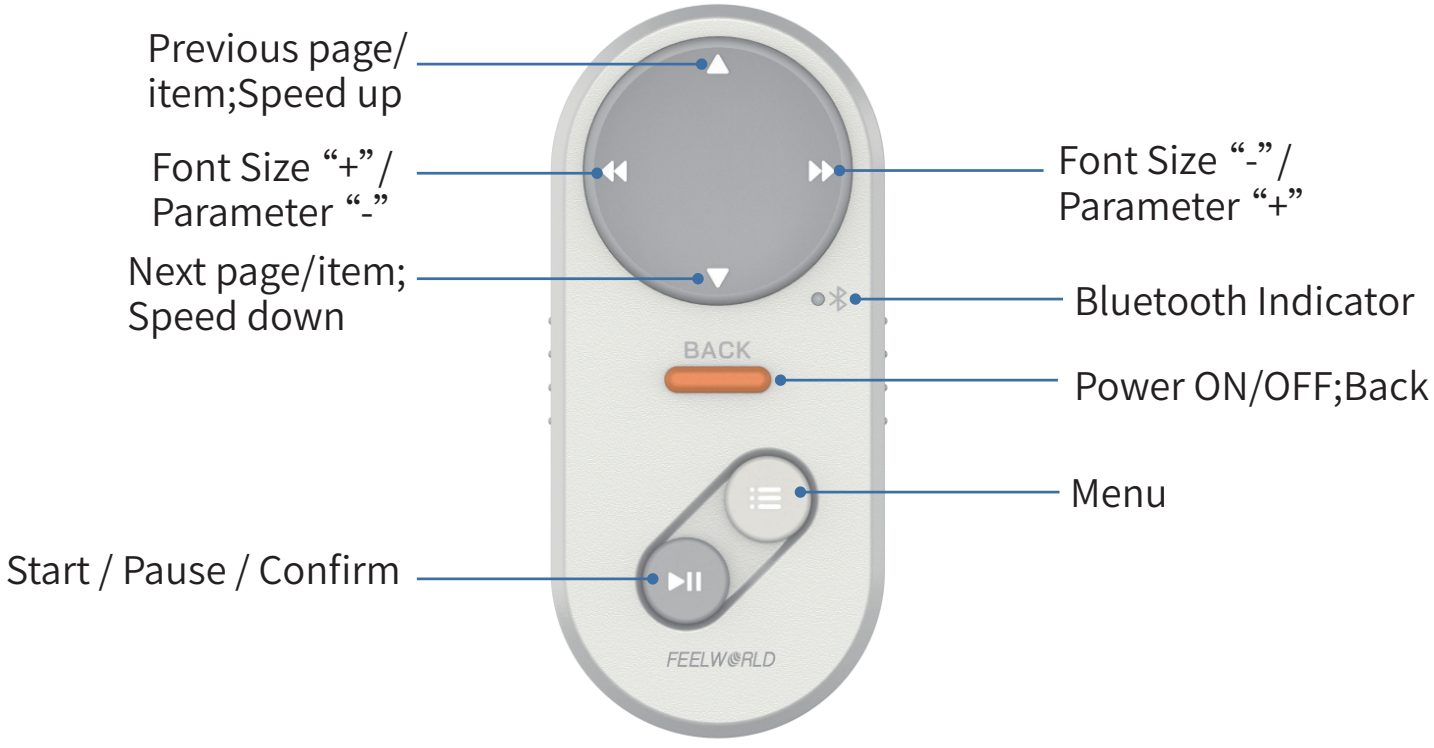

Notice: Due to different brand phone, some smarthone function will be different after connected the remote.

REMOTE CONTROLLER

Bluetooth Remote Controller Connection & Operation Guide

I. Basic Operations (Power On/Off)

1. Power On

Prerequisite: Insert 2 × AAA batteries into the remote controller first.

Operation: Hold down the【BACK】key for approximately 3 seconds until the indicator light turns on, and the system completes startup.

2.Power Off

Operation: Hold down the【BACK】key for approximately 3 seconds until the indicator light turns off , and the system completes shutdown.

3. Standby & Restart Notes

When powered on, the remote will automatically enter sleep standby mode after 2 hours of inactivity.

To wake up the device, hold down the【BACK】key for 3 seconds.

4. Indicator Light Status Description

Light Off: Sleep mode

Flashing: Pairing in progress

Steady On: Connected successfully

Press any key: Indicator light flashes once

REMOTE CONTROLLER

II. iOS Connection Steps (Must Follow the Operation Sequence Strictly)

Enable the Bluetooth function on your iPhone;
Launch the corresponding APP (Note: Ensure the APP is updated to the latest version);
Turn on the remote control following the "Power On" operation above. At this point, the LED indicator will flash, and the remote control will automatically enter wireless pairing mode;
When your iPhone displays a Bluetooth pairing prompt, select "Allow Pairing". After successful pairing, the APP will show the connection status.

III. iOS Connection Troubleshooting (When the Remote Control Fails to Connect to iPhone)
Troubleshooting Step 1: Check Bluetooth Connection Status
Go to the phone's system "Bluetooth Settings" and check if the remote control is listed as a connected device. If there is an abnormal connection, disconnect it first.

Troubleshooting Step 2: Re-pair the Connection (Operate in the Following Sequence)
Disconnect the existing Bluetooth connection between the phone and the remote control (if connected), then turn off the remote control;

Re-enable the Bluetooth function on your phone;
Launch the corresponding APP;
Press and hold the remote control's【BACK】key again to turn it on. Wait for the LED indicator to flash and automatically enter pairing mode, then complete the pairing as prompted by your phone.

REMOTE CONTROLLER

IV. Android Connection

First, turn on the power switch of the remote control. At this point, the LED indicator will flash rapidly, indicating that the device is powered on and has entered pairing-ready mode. Next, enable the Bluetooth function on your mobile phone, then open the teleprompter app. Once the app is launched, the remote control will automatically activate the wireless pairing mode. Upon successful Bluetooth connection, a clear notification stating "Bluetooth Connected" will immediately appear on the app interface, and you can then use the remote control normally.

APP DOWNLOAD

iOS APP Download

Download on the App Store

iOS users serach “ **FEELWORLD**” to get

Android APP Download


Android APP on Google Play

Android users serach “**FEELWORLD**” to get

APP INSTRUCTION


After installed APP and enter app

Tap “+” to enter Edit dialoge

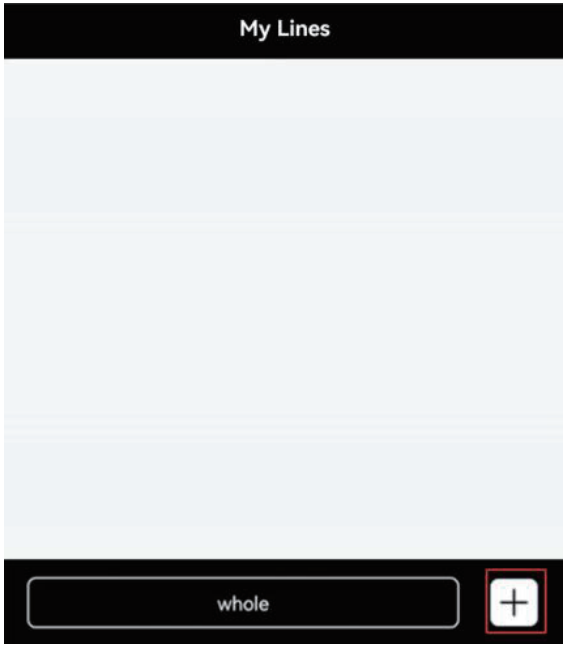


You can edit the title and content directly or click “Open” to import the text from the phone, then click “Save”

Click “whole”, you can manage the whole files

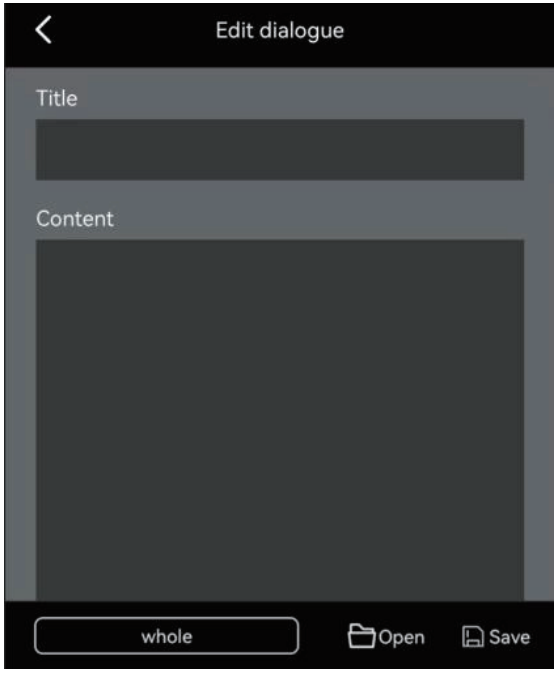


APP INSTRUCTION

Click “Folder Management”, you can set new folder or delete folder

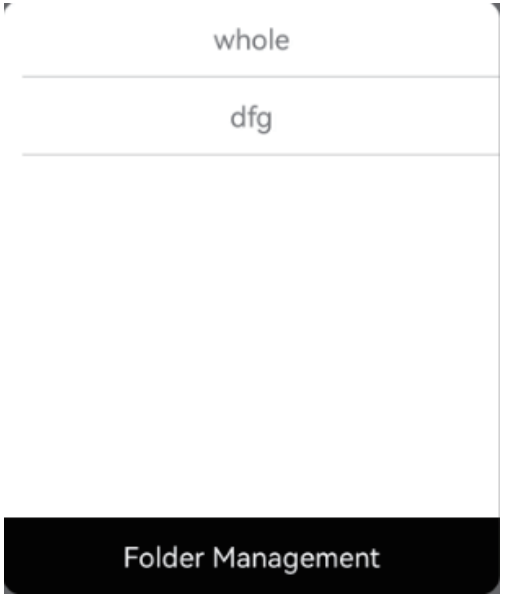




After saved the file, click the text to enter the play interface.
You can also tap icon to edit the text or tap icon to manage the file

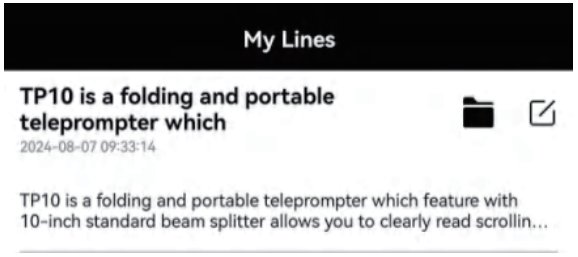

If you want to delete the file, please swipe left at the corresponding file location and tap “Delete”

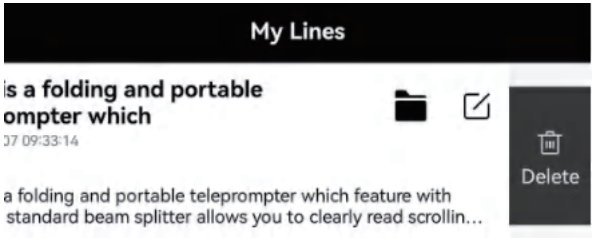

APP INSTRUCTION

After enterd play interface and tap any position, the function menu will show on the bottom, tap again can hide the function menu.

Click on the desired function icon to turn on its function



: Play/Pause

: Adjust the font size, word space, space, text color, background

: Adjust browse speed (Icon turns red when the function is enabled. Click again to turn it off)

: Loop play (Icon turns red when the function is enabled. Click again to turn it off)


: Previous page

: Next page

: Vertical/Horizontal screen switch

: Mirror

FEELWORLD TP16 with larger beam splitter, easily installation, flexible control, made you speak in front of the camera with confidence, lesser on your script.Suitable for program recording, character interview, online course, vlog creation, commercial Ads shooting, ideal for video, program creators.



PARAMETER

Model No.	TP13 V2
Main Material	Metal
Splitter Glass Size	13 Inch
Beam Splitter Transmission/Reflection ratio	70/30
Prompting Device Supporting Size	Up to 12"
Compatible Lens	Incompatible with wide-angle lenses; suitable for lenses with a focal length of ⩾35mm
Control Way	APP, Bluetooth remote control
Unit Size	270x280x80mm
Unit Weight	1.7kg

FAQ

FAQ: The remote controller can not connect the Android phone, how can I do?

1. Please check Location Permission on your phone, the connection need turn on permission.
2. Please check if the remote controller has been connected with your phone.
3. Please check if there is Bluetooth signal from remote controller.(check by other app to detect the Bluetooth)
4. Reboot the remote controller, reopen the app.

FAQ:The remote controller has been connected my Android phone, but it can not control the app.

1. Please close other app at background on your phone.
2. Please turn off Bluetooth on other phones on worksite, to make sure your Android phone is the only device to connect the remote controller.
3. Please make sure that every time to connect with your phone is by app, not by Setting on you phone.

★ As we are improving product features and product performance, so if there is any change on the specification without prior notice.