


LED Point-Source Video Light

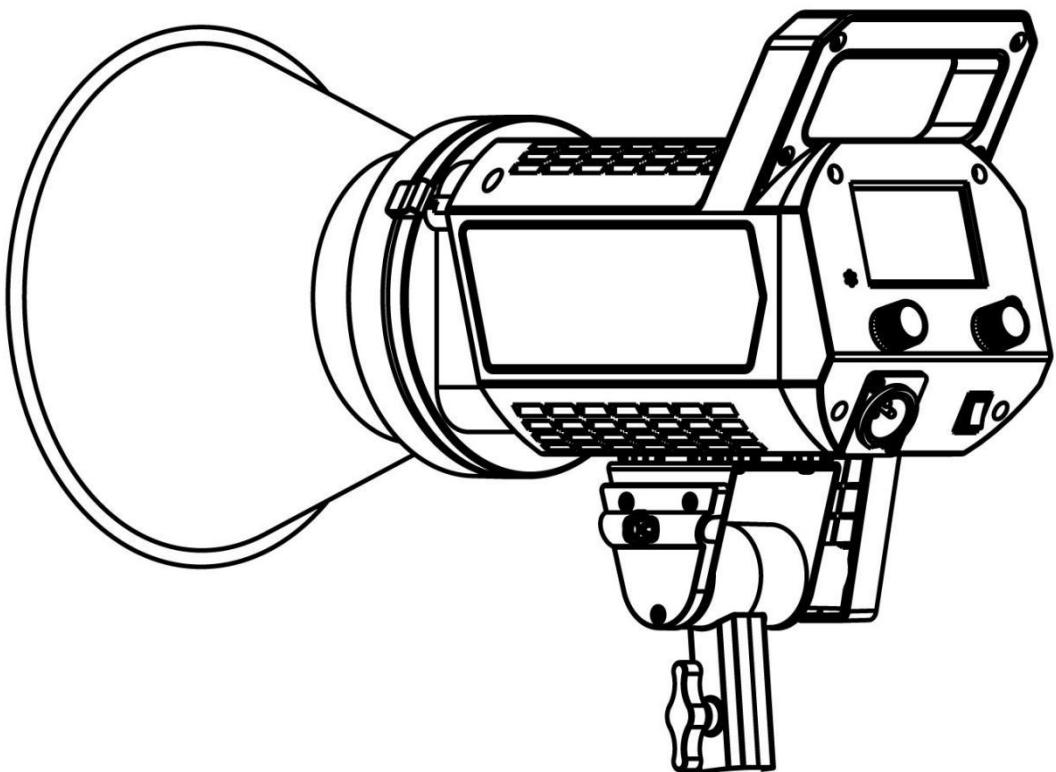

User Manual

Foreword

Thank you for purchasing our LED video light. Please read this manual carefully before using the unit. Have a great experience!

Remark: This manual use for daylight and Bi-color devices

Safety Precautions

1. Please remove the protective cap on the light before using.
2. Keep the light safely stored and away from children.
3. Care must be taken to avoid burns when touching hot parts.
4. Do not operate equipment with damaged power cords and equipment that has been dropped or damaged until inspected by qualified service personnel.
5. Always unplug appliances from the electrical outlet before cleaning and servicing and when not in use. Never pull the cord to unplug the plug from the outlet, grab the plug and pull to unplug.
6. To reduce the risk of electric shock, do not immerse this product in water or other liquids
7. To reduce the risk of electric shock, do not disassemble this product and take it to a qualified service person when service is required. Improper reassembly may cause electric shock during subsequent use of the device.
8. When the product is working, do not block the heat dissipation holes, and do not look directly at the lamp beads; when the lamp is used for a long time, the surface temperature of the lamp is high, please pay attention to prevent scalding
9. Do not touch the lamp beads any circumstances.
10. Do not place this product near flammable and volatile solvents to avoid damage to the product.
11. Please clean the device with a soft, dry cloth.
12. Do not use this device in a humid environment, otherwise there is a risk of short circuit or electric shock.



Key Features

- ◆ Light control integration, more convenient dimming
- ◆ 2-inch LCD screen, real-time display the data
- ◆ High color rendering index, restore true colors
- ◆ Daylight and Bi-color (optional), meet the needs of diverse scenarios
- ◆ 10 Special effects to create a variety of atmosphere and lighting effects
- ◆ Bowens mount design, compatible with various Bowens accessories
- ◆ Supports iOS/Android system APP (Feelworld Light), easily wireless Bluetooth control
- ◆ Exquisite carrying case, well storage and protection

CONTENTS

1. Product Structure and Instruction -----	4
2. Power Input Method -----	5
3. Installation and Removal -----	6
3.1 Protection cap installation and removal -----	6
3.2 Reflector installation and removal -----	6
3.3 Light frame installation and removal -----	7
4. Operation Instruction -----	7
5. APP Instruction -----	9
5.1 APP Download -----	9
5.2 APP Connection -----	10
5.3 APP Operation -----	11
6. Product Specification -----	13
7. Illumination -----	14
8. General Fault Detection and Diagnosis -----	15

1. Product Structure and Instruction

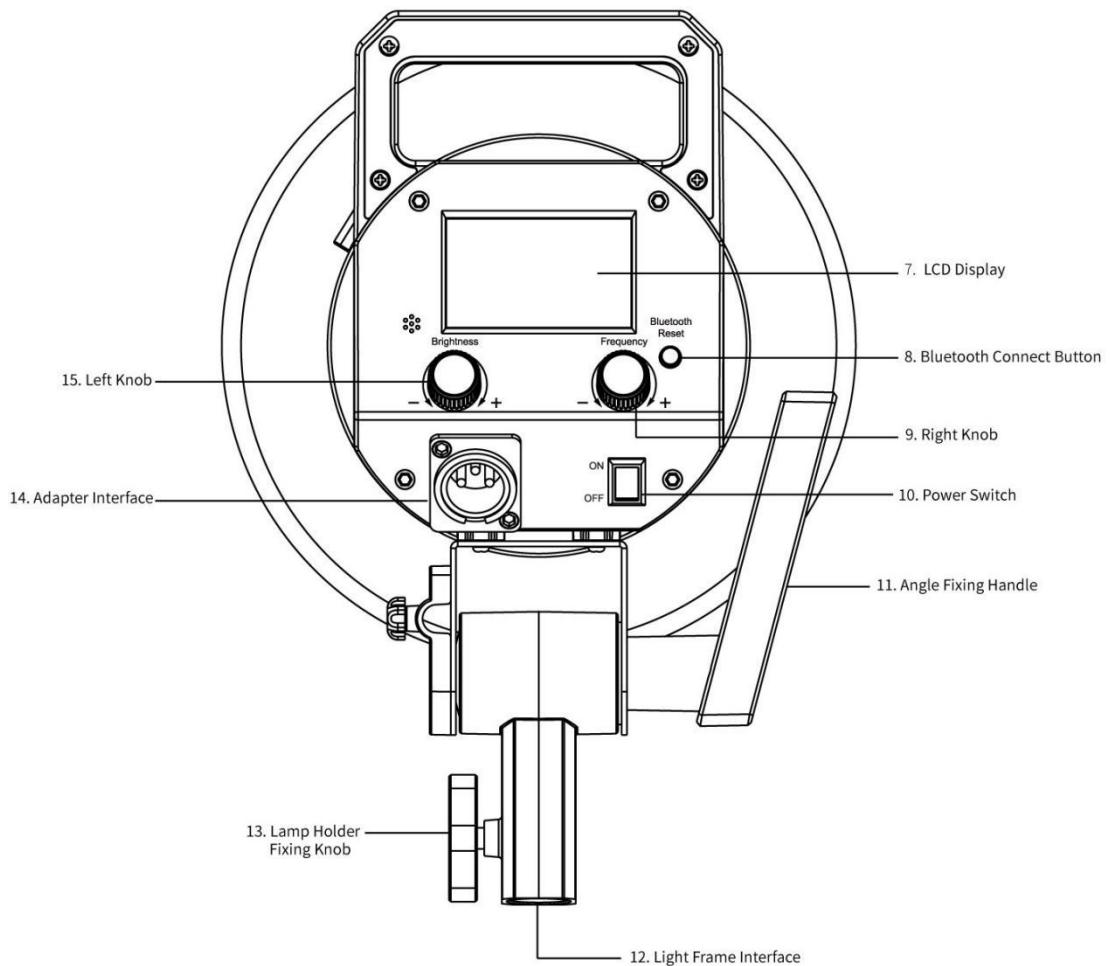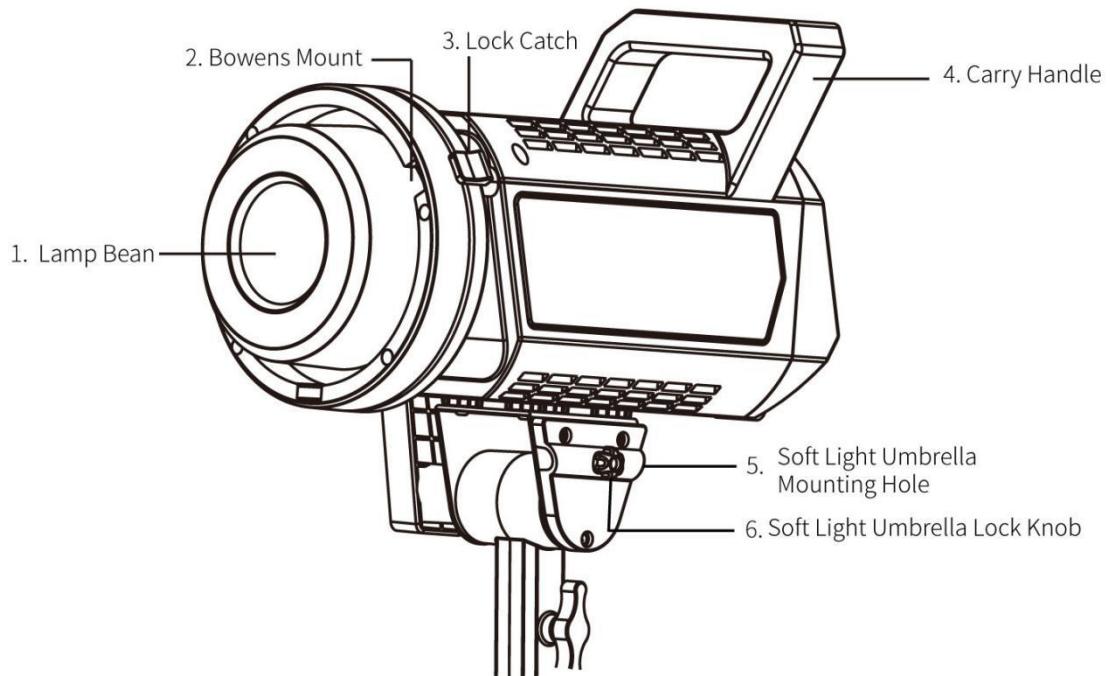


1. Lamp Bean: COB lamp bean
2. Bowens Mount: use for install protection cap, reflector or other Bowens accessories
3. Lock Catch: use for removal protection cap, reflector or other Bowens accessories
4. Carry Handle: use for carry the device
5. Soft Light Umbrella Mounting Hole: use for install soft light umbrella (soft light umbrella not including)
6. Soft Light Umbrella Lock Knob: use for fixing the soft light umbrella
7. LCD Display: display the data
8. Bluetooth Connect Button: use for device connect to APP
9. Right Knob: user for function selection and language setting
10. Power Switch: Turn on/off the device
11. Angle Fixing Handle: Loosen the handle to adjust the pitch angle of the lamp, and fix it after adjusted
12. Light Frame Interface: the interface of fixing the device on the bracket
13. Lamp Holder Fixing Knob: use for fixing the device on the bracket
14. Adapter Interface: power input interface
15. Left Knob: use for adjust the brightness or color temperature

2. Power Input Method

The device power by 3 pin XLR interface power supply.


Polarity of the 3-pin XLR power input as below image, please note the polarity of the power input, otherwise it may damage the device.

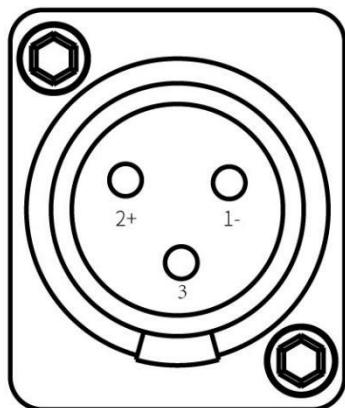


PIN	IN
1	GND
2	+
3	No connection

3. Installation and Removal

3.1 Protection cap installation and removal

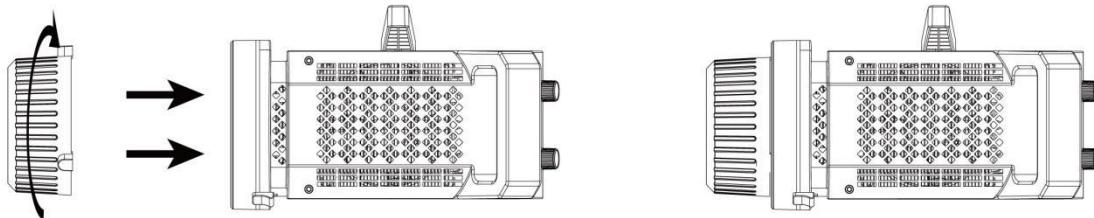


①. When installing the protection cap, align the protective cover with the Bowens mount points, rotate the protective cover, and fasten the protective cover to the lamp body.

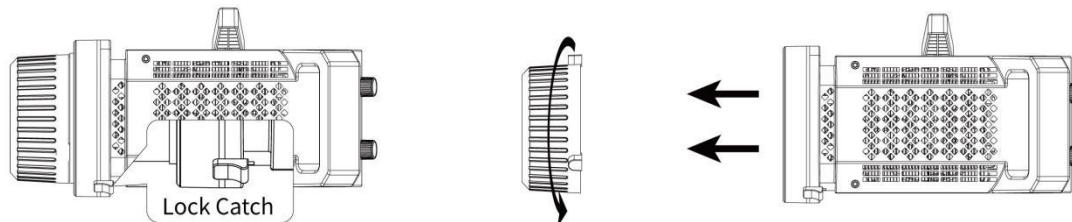


②. When removing the protection cap, press down the lock catch and rotate the protection cap at the same time to take out the protection cap.

Note: Be sure to remove the protection cap before using the lamp

3.2 Reflector installation and removal

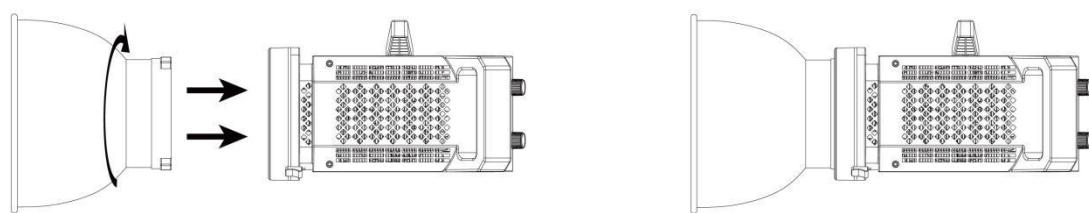

①. When installing the reflector, align the reflector with the Bowens mount points, rotate the reflector, and fasten the reflector to the lamp body.

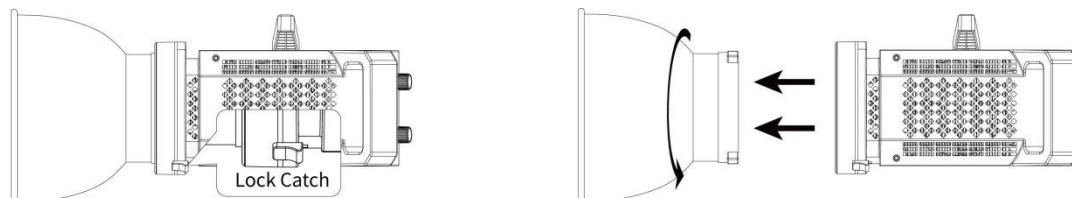


②. When removing the reflector, press down the lock catch and rotate the

reflector at the same time to take out the reflector.

3.3 Light frame installation and removal

The lamp can be installed and fixed on the bracket by rotating the knob clockwise, and unloaded by rotating in the counterclockwise direction

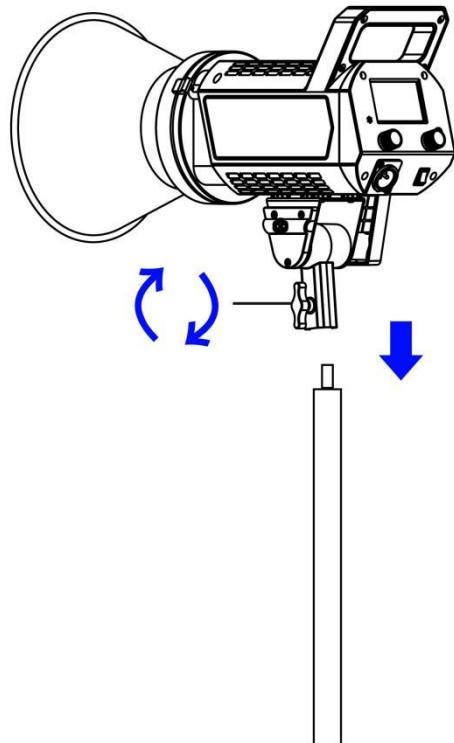

4. Operation Instruction

● Daylight

Connecting Power, turn on the power switch

Rotate the left knob (Brightness) to adjust the brightness

Brightness: 0~100%

Rotate the right knob (Frequency) to adjust the mode or frequency, press to select the mode or frequency

Mode: Normal, Paparazzi, Fireworks, Lighting, Fault Bulb, TV, Breath, Flash, Party, Flame, Music

Frequency: 0~10

INT:	50%	*	🔇
CCT:	5600K	29°C	
MODE:		Paparazzi	
FRQ:	5	ID: a5008f	

Remark: each device has a ID number

Language Select: Long press the right knob (Frequency) to display the language select interface, rotate the right knob to select and short press to confirm.

Language Select

English

Chinese

● Bi-color

Connecting Power, turn on the power switch

Rotate the left knob (Brightness) to adjust the brightness or color temperature

Brightness: 0~100%

Color Temperature Range: 2700K~6500K

Rotate the right knob (Frequency) to adjust the mode or frequency, press to select the mode or frequency

Mode: Normal, Paparazzi, Fireworks, Lighting, Fault Bulb, TV, Breath, Flash, Party, Flame, Music

Frequency: 0~10

INT: 50% * 
CCT: 3500K 29°C

MODE: Paparazzi
FRQ: 5 ID: a50021

Remark: each device has a ID number

Language Select: Long press the right knob (Frequency) to display the language select interface, rotate the right knob to select and short press to confirm.

Language Select


English

Chinese

5. APP Instruction


5. 1 APP Download

iOS APP Download

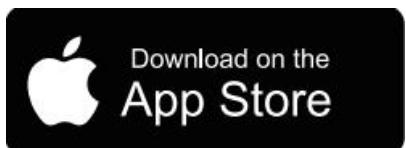

iOS user search “feelworld light” in App Store to get

Android APP Download

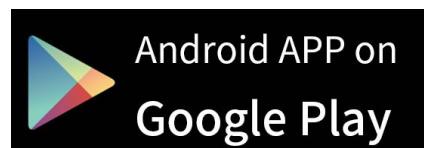

Android user search “feelworld light” in Google Play to get



or scan the QR code to download

5.2 APP Connection (e.g. Android System)

After installing the APP, please register according to the prompts. Open the APP, click "Scanner" and long press the "Bluetooth Reset" button on the

device until the scanned device name as shown on the right is displayed on the APP, then click to tick and connect. After connection is successful, the Bluetooth icon  will be displayed on the device screen.



When you need to reconnect after disconnection, click "Light" and select the desired connected device in the light list, click "Connect Device" to connect.




5.3 APP Operation (e.g. Android System)

After connecting, click "Scene" on the APP, and click the device name. Then you can control the color temperature, brightness, special effects, etc. for the light.




Click “WHITE LIGHT” can adjust the color temperature or brightness


Remark: the daylight device can't adjust the color temperature

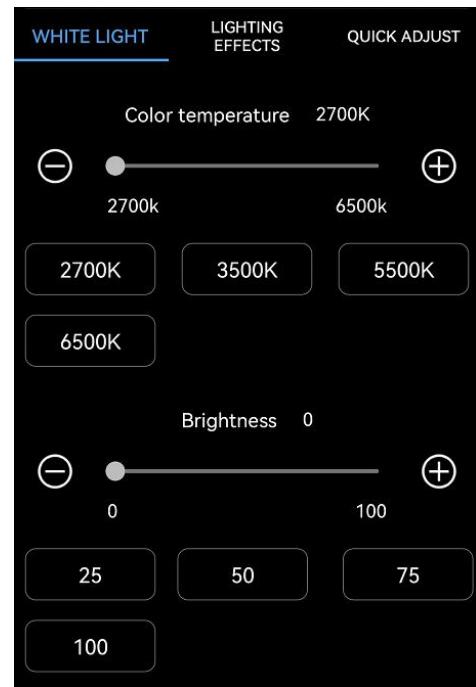


Click “LIGHTING EFFECTS” to select the effect and adjust the color temperature, brightness and frequency

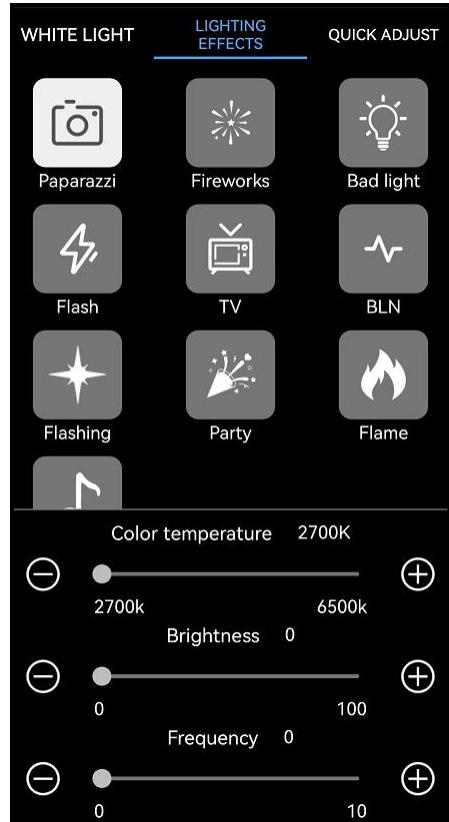

Click “QUICK ADJUST” can quick adjust the single device or all devices

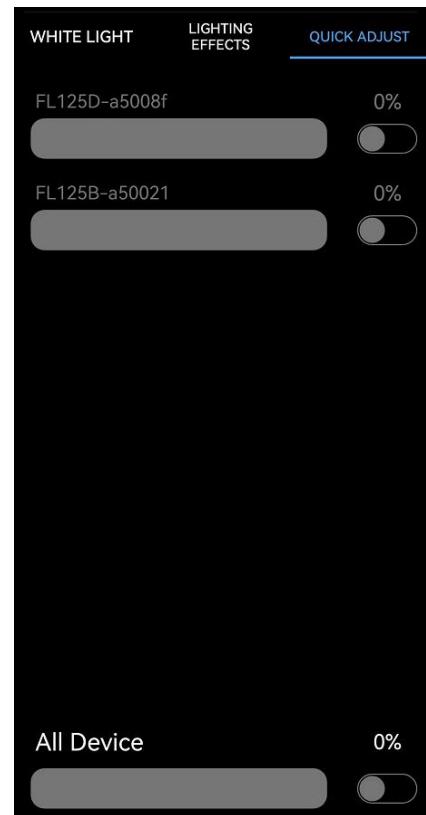

Click “System” to select the language

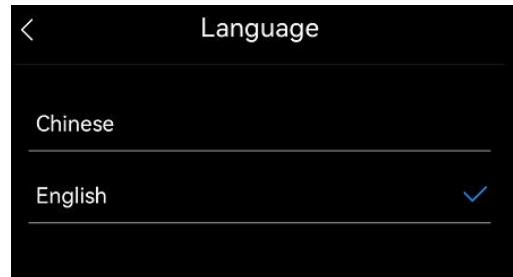

6. Product Specification

Power Consumption	125W Max:150W	225W Max:225W
Working Current	7.8A@DC 19V	12.6A@DC 20V
Input Voltage	DC12~34V	
Adapter Input Voltage	AC100~240V (50/60Hz)	
Color Temperature	Daylight 5600K ($\pm 200K$) Bi-color 2700K-6500K ($\pm 200K$)	
CRI	96+	
TLCI	98+	
Dimming	0~100	
APP Control Way	Bluetooth	

Cooling Method	Active Cooling
Product Size	Lamp Frame (w/o protection cap) 221x105x180mm
Product Weight	1.53kg

7. Illumination

7.1 The illumination of 1M for daylight device

Light Only

Power	Color Temp	Illumination
125W	5600K	5150lux/478fc
225W	5600K	8250lux/766fc

With Reflector

Power	Color Temp	Illumination
125W	5600K	48500lux/4506fc
225W	5600K	67500lux/6271fc

7.2 The illumination of 1M for bi-color device

Light Only

Power	Color Temp	Illumination
125W	2700K	2650lux/246fc
	3200K	3400lux/316fc
	5600K	4250lux/395fc
	6500K	3700lux/344fc
225W	2700K	4800lux/446fc
	3200K	6150lux/571fc
	5600K	7950lux/738fc
	6500K	6950lux/646fc

With Reflector

Power	Color Temp	Illumination
125W	2700K	23500lux/2183fc

	3200K	30100lux/2796fc
	5600K	37600lux/3493fc
	6500K	32600lux/3029fc
225W	2700K	39800lux/3698fc
	3200K	49500lux/4599fc
	5600K	64500lux/5992fc
	6500K	56500lux/5249fc

8. General Fault Detection and Diagnosis

8.1 The light won't start up

- ①. Please check whether there is loose connection between the power adapter and the power cable or the power adapter and the outlet.
- ②. Please check whether the voltage of power adapter is within designated range

8.2 LCD display is on but no light output

COB light bean or main board might be damaged.

- If there are still other problems, please contact with our related technologists.

★ As we are improving product features and product performance, so if there is any change on the specification without prior notice.