

FEELWORLD®

S7

12G-SDI

7" FIELD MONITOR

Powerful Film, Broadcast, Video Creation Assist



Highlight
1600nit



7 Inch
1920X1200



Color
Depth 10bit



Touch
Screen



HDMI&SDI
Cross Conversion



HDMI
2.0



HDMI/SDI
LUT Out



Aluminium
CNC

FHD
1920x1200

10BIT
Color Depth

1200:1
Contrast

160°
Viewing Angle

CM CALMAN
Calibration Software

DCI-P3
Film-grade Color Gamut

FEATURES

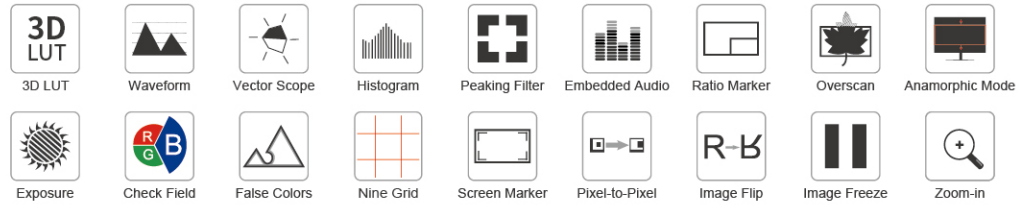
- 7-inch 1920x1200 full HD IPS screen, view details with confidence
- Touch screen menu operation, improve shooting efficiency
- 1600nits daylight viewable
- Rugged aluminium housing
- 12G-SDI high speed transmission, meet more professional production
- Support SDI & HDMI cross conversion, easy to handle various tasks
- SDI/HDMI support loop-out LUT effect
- HDMI max. display 8 channels audio meter, SDI max. display 16 channels audio meter
- Three color TALLY indicator, enhance team cooperation
- Stereo earphone output, convenient to monitoring
- Standard accessory F970 dual battery plates, long-lasting power for outdoor filming

FLEXIBLE POWER SUPPLY

F970 Dual Battery Plates, DC IN



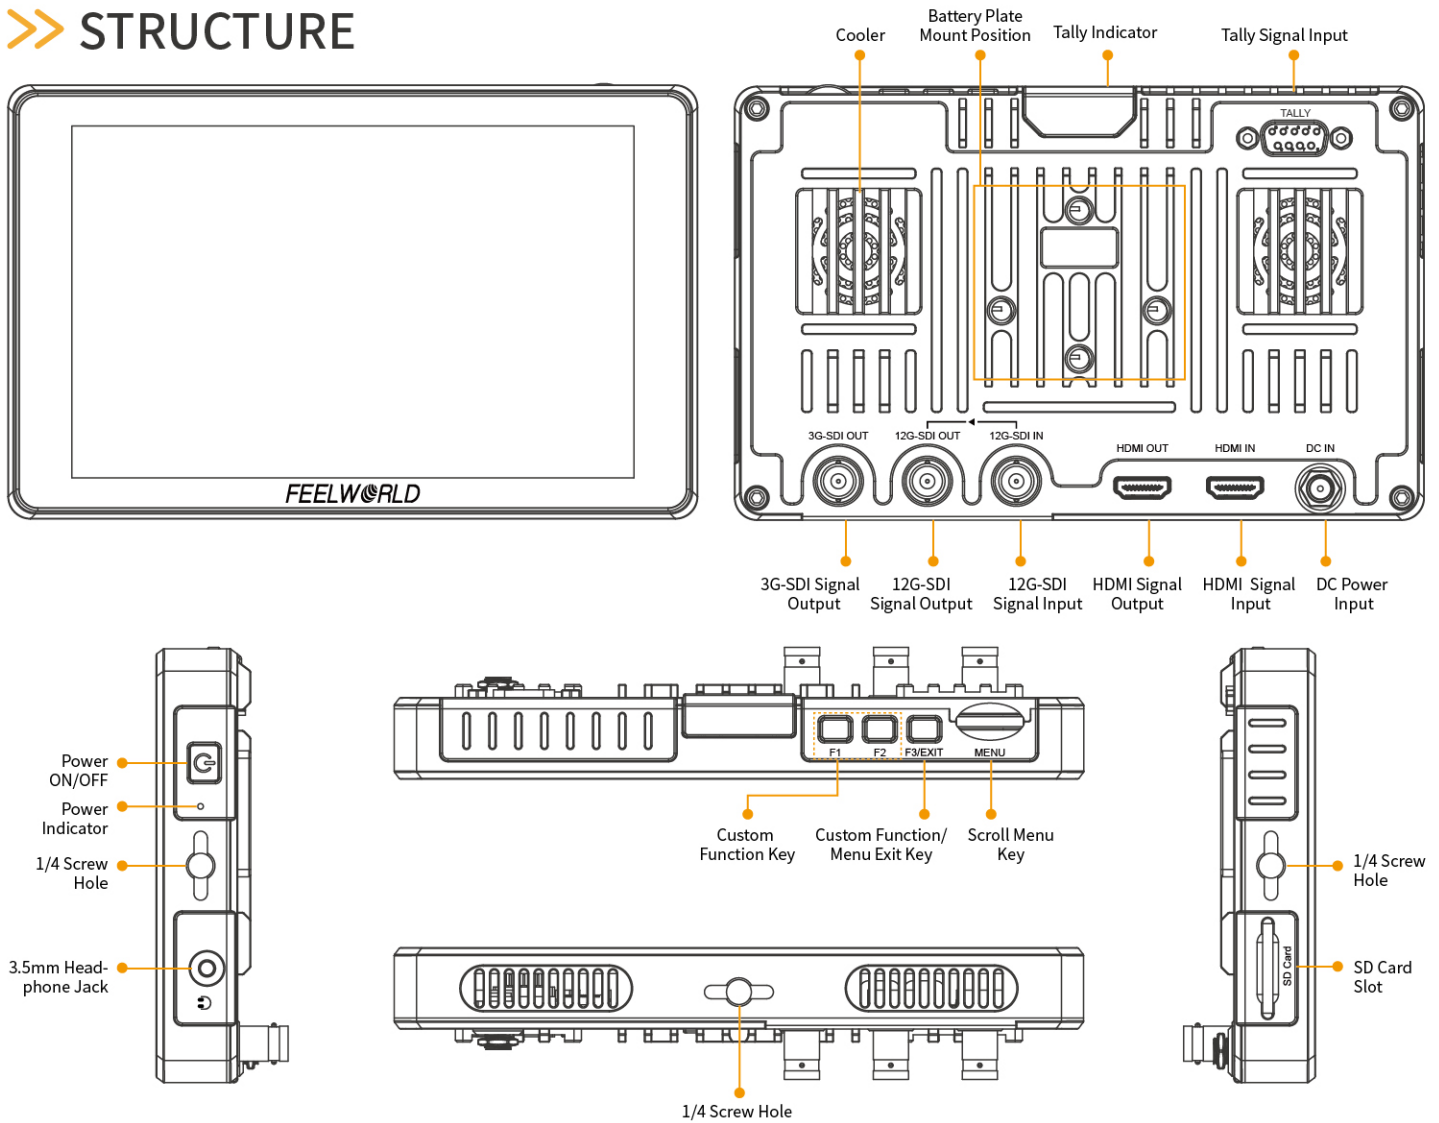
>> FULL RANGE OF AUXILIARY FUNCTIONS









>> PARAMETER

Description	7" 12G-SDI Field Monitor
Model	S7
Screen size	7" IPS
Number of Colors	1.07B
Color Depth	10bit (8+2bit)
Resolution	1920x1200 pixels
Aspect Ratio	16:10
Brightness	1600cd/m2
Contrast	1200:1
Backlight	LED
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	12G-SDI*1, HDMI 2.0*1, SD Card slot, Tally
Output	12G-SDI*1, 3G-SDI *1, HDMI 2.0 *1
Audio	3.5mm Stereo Headphone
12G-SDI Input & Output Support Format	1080i (60/59.94/50)
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/ 23.98sF)
	2048×1080 (30p/30PsF/29.97p/29.97PsF/25p/25PsF/24p/24PsF/23.98p/23.98PsF)
	4K 3840×2160p (23.98/24/25/29.97/30/47.95/48/50/ 59.94/60)
4K 4096×2160p (23.98/24/25/29.97/30/47.95/48/50/ 59.94/60)	
3G-SDI Output Support Format	1080i (60/59.94/50)
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/ 23.98sF)
HDMI Inpput Support Format	1080i (60/59.94/50)
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/ 23.98sF)
	4K 3840×2160p (60/50/30/29.97/25/24/23.98)
	4K 4096×2160p (50/60Hz)
HDMI Outpu Support Format	When set Display
	1080i (60/59.94/50)
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/ 23.98sF)
	When set Loop Out
	1080i (60/59.94/50)
	720p (60/59.94/50/30/29.97/25/24/23.98)
	1080p (60/59.94/50/30/29.97/25/24/24sF/23.98/ 23.98sF)
4K 3840×2160p (60/50/30/29.97/25/24/23.98)	
4K 4096×2160p (50/60)	
Power Consumption	≤16W
Input Voltage	DC 12V
Power Connector	DC
Battery Plate	Compatible with F970 Battery Plate/ V-mount Battery Plate
Operating Temperature	-20°C ~ 50°C
Storage Temperature	-30°C ~ 60°C
Install Way	three 1/4"-20 Thread Point (bottom, left, right)
Unit Size	186*116.9*25(mm)
Unit Weight	550g

>> STRUCTURE



>> PACKING LIST

 <p>Monitor</p>	 <p>Mini HDMI Cable</p>	 <p>HDMI Cable</p>
 <p>Mini Hot Shoe Mount + Hex Wrench</p>	 <p>F970 Dual Battery Plate</p>	 <p>Manual</p>

HDMI® **CE** **FC** **RoHS**

Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn