



HV10X FHD PROFESSIONAL STREAMING CAMERA

Make The Live Streaming Easier



FHD Image



10X Optical Zoom



Auto Focus



Built-in 2 Mics



H/V Screen Switching



2D&3D DNR



Remote Control




KEY FEATURES

- 1/2.8 inch High quality sensor, resolution is up to 1920x1080 with frame rate up to 60fps.
- 10X optical zoom lens and 68.8° wide angle lens.
- HDMI, USB3.0 Simultaneously output audio and video signal
- Fast, accurate and stable auto focusing technology.
- Support to switch the horizontal screen and vertical screen output mode via DIP Switch, to better meet customers' demands.
- Support the beauty and jewelry style mode, and adjust the best image effect for live scenes.
- Built-in 2 mics, the unique noise suppression algorithm makes your voice perfectly presented.
- Super high SNR image is achieved with low noise CMOS. Advanced 2D/3D noise reduction technology further reduces the noise while ensuring high image clarity.
- No need to download drivers, USB output is plug and play, with a convenient and concise user experience.

STRUCTURE


Interface Description:		
1. Built in pick-up	4. Screw Hole for Tripod	7. HDMI Interface
2. Focusing aid	5. Tripod Screw Hole	8. USB 3.0 Interface
3. Lens	6. Power Switch	9. DIP Switch

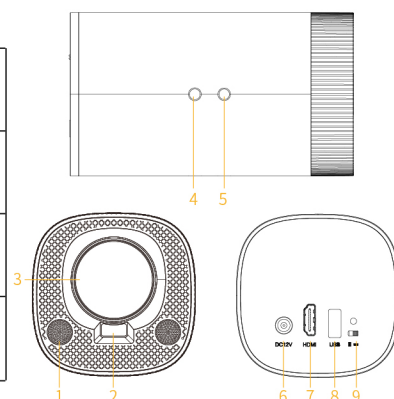

>> PARAMETERS

Description	FHD Professional Streaming Camera		
Model No.	HV10X		
Camera Lens	Image Sensor	1/2.8inch high quality CMOS sensor	
	Effective Pixels	16:9, 2.07 megapixel	
	Video Format	HDMI	720p (60/59.94/50) 1080P(60/59.94/50/30/29.97/25)
		USB horizontal screen	YUY2/NV12:1920×1080/1280×720/1024×576/960×540/800×600/800×448/640×480/640×360/480×270@30/25/20/15/10/5fps MJPG/H264:1920×1080/1600×896/1280×720/1024×576/800×600/800×448/720×576/720×480/640×480/640×360/352×288@30/25/20/15/10/5fps
		USB Vertical Screen	YUY2/NV12:1080×1920/720×1280/576×1024/600×800/448×800/480×640/360×640/270×480/180×320@30/25/20/15/10/5fps MJPG/H264:1080×1920/896×1600/720×1280/576×1024/600×800/448×800/576×720/480×720/480×640/360×640/288×352@30/25/20/15/10/5fps
		Optical Zoom	10X
	Viewing Angle	8.8°~68°	
	Focus Length	f=4.34mm~41.66mm	
	Minimum Illumination	0.1Lux(F1.8, AGC ON)	
	DNR	2D & 3D DNR	
	Focus	Auto/Manual/One Push Focus	
	Super Auto Noise Reduction	On/Off	
	White Balance	Auto / Manual/ One Push Specified Temperate(2400k-7100k)	
	Exposure	Auto/Manual/Shutter priority/Aperture priority/Brightness priority	
	Backlight Contrast	On/Off	
	Vertical Screen Swith	On/Off	
Interface Parameter	Video Output	USB (support audio signal ouput);	
	Video Compression Format	YUV, NV12, MJPG, H.264	
	Audio Input	Built-in 2 MIC	
Other Parameter	Control Interface	USB	
	Input Voltage	Power Adapter 12V; USB 5V	
	Power Current	Power Adapter 0.425A; USB 1A(max)	
	Power Consumption	5W(Max.)	
	Storage Temperature	-10°C~+60°C	
	Storage Humidity	20%~90%	
	Working Temperature	-10°C~+50°C	
	Working Humidity	20%~80%	
	Dimension	78mm×137.5mm×78mm	
	Unit Weight	0.6kg	
	Environment	Indoor	

>> Packing List

				
Camera	Power Adapter	USB3.0 Cable	Wireless Remote Controller	User Manual



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2672627

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn