
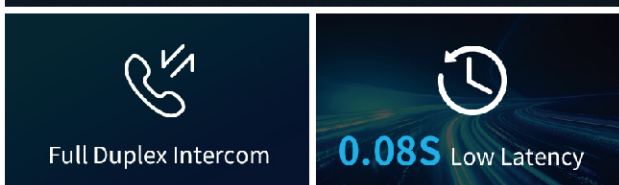


WT1S | 4K

Wireless Video Transmitter & Receiver

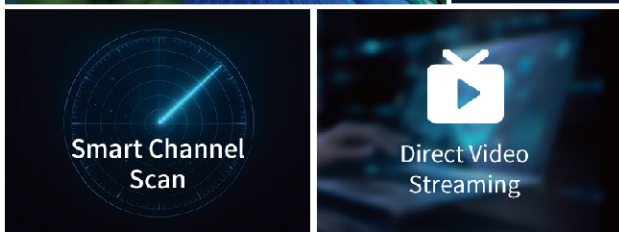

>> KEY FEATURES

- Transmission range up to 1000ft, with ultra-low latency 0.08S
- Up to 4K 30Hz, present image with superior clarity, detail and realism
- Wireless full-duplex talkback, real-time intercom between the director and the photographer
- With type-C to Ethernet adapter accessory, achieve live streaming
- The transmitter can be switched as a receiver at will
- One TX to 4 RX, meet more monitoring needs
- Under Grouping mode, TX and RX can be paired easily and quickly
- Support APP monitoring & recording for Android/iOS system
- 13 frequency channels, AUTO channel scan

>> MULTIPLE POWER OPTIONS





>> PARAMETER

	Transmitter	Receiver
Screen	OLED	OLED
Interface	1 * SDI Input	2* HDMI Output
	1 * HDMI Input, 1* HDMI Output	1 * SDI Output
	2 * Antenna port (RP-SMA Male)	2 * Antenna port (RP-SMA Male)
	DC Input	DC Input
	3.5mm headphone jack	3.5mm headphone jack
	Type-C	Type-C
Power Supply Way	Type-C: 5V/1.5A	Type-C: 5V/1.5A
	DC adapter: 6-16V	DC adapter: 6-16V
	NP-F battery slot	NP-F battery slot
Power Consumption	<5.5W	<6W
HDMI Input/Output Video Format	480P60, 576P60	480P60, 576P60
	720P60/59.94/50	720P60/59.94/50
	1080P60/59.94/50/30/29.97/25/24/23.98	1080P60/59.94/50/30/29.97/25/24/23.98
	1080I60/59.94/50	1080I60/59.94/50
	2160P30/25/24	2160P30/25/24
	HDMI Type A	HDMI Type A
SDI Input/Output Video Format	480P60, 576P60	480P60, 576P60
	720P60/59.94/50	720P60/59.94/50
	1080P60/59.94/5030/29.97/25/24/23.98	1080P60/59.94/5030/29.97/25/24/23.98
	1080I60/59.94/50	1080I60/59.94/50
	1*BNC	1*BNC
Frequency	5.1-5.9(GHz)	5.1-5.9(GHz)
Modulation Mode	OFDM	OFDM
Transmission Power	22dBm	
Receiving Sensitivity		-87dBm
Band Width	20/40MHZ	20/40MHZ
Latency	Min0.08S	Min0.08S
Intercom Frequency Response Range	20Hz~20KHz	20Hz~20KHz
Operating Temperature	0°C ~ 40°C	0°C ~ 40°C
Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C
Unit Size(mm)	77.1L*30W*118.6H (excluding antenna)	77.1L*30W*118.6H (excluding antenna)
Unit Weight	138.8g (excluding antenna)	138.8g (excluding antenna)

>> PACKING LIST

						
Transmitter	Receiver	Antennas	Cold Shoe	USB-C to Ethernet Adapter	USB-A to USB-C Adapter	Quick Start Guide

>> STRUCTURE

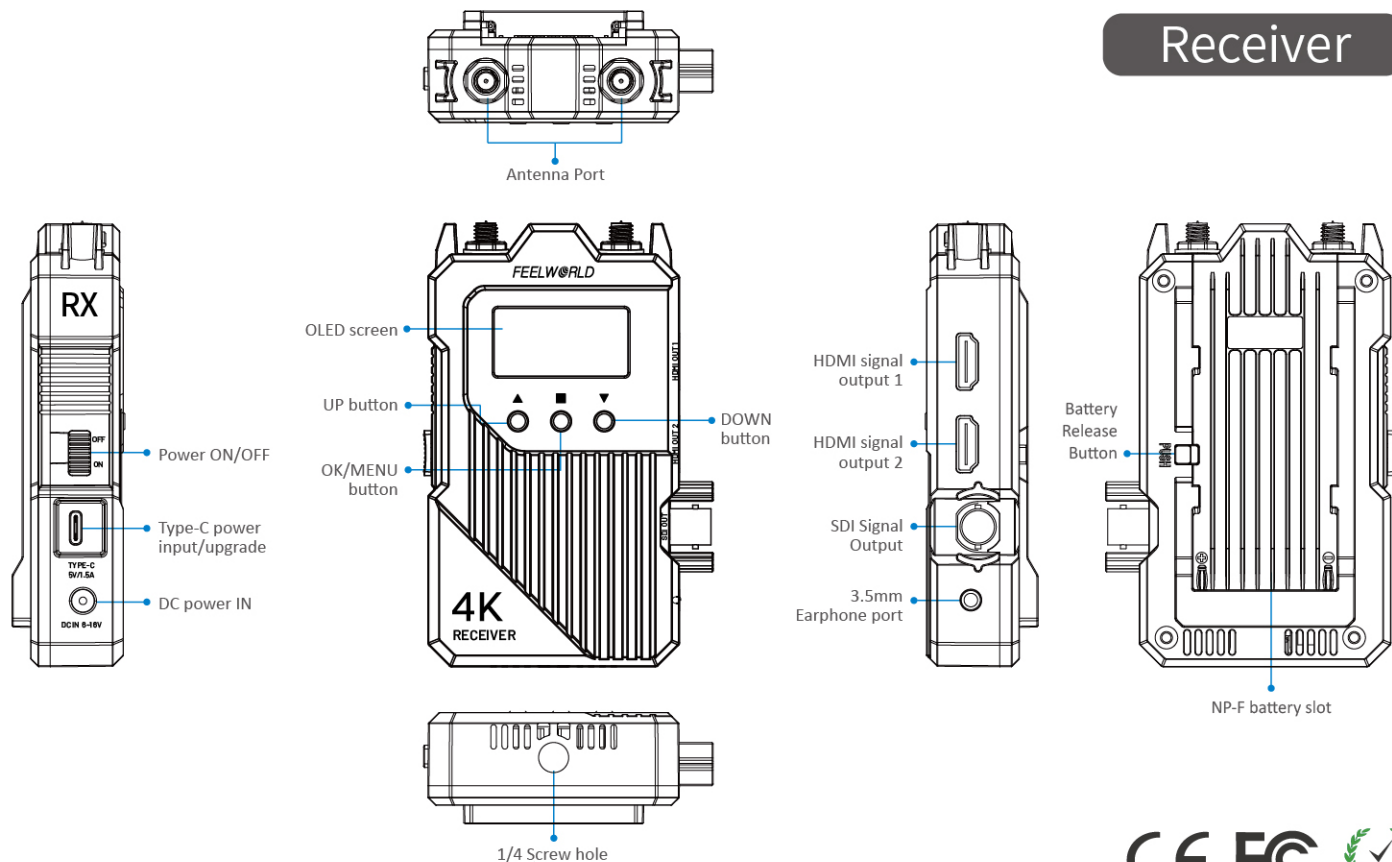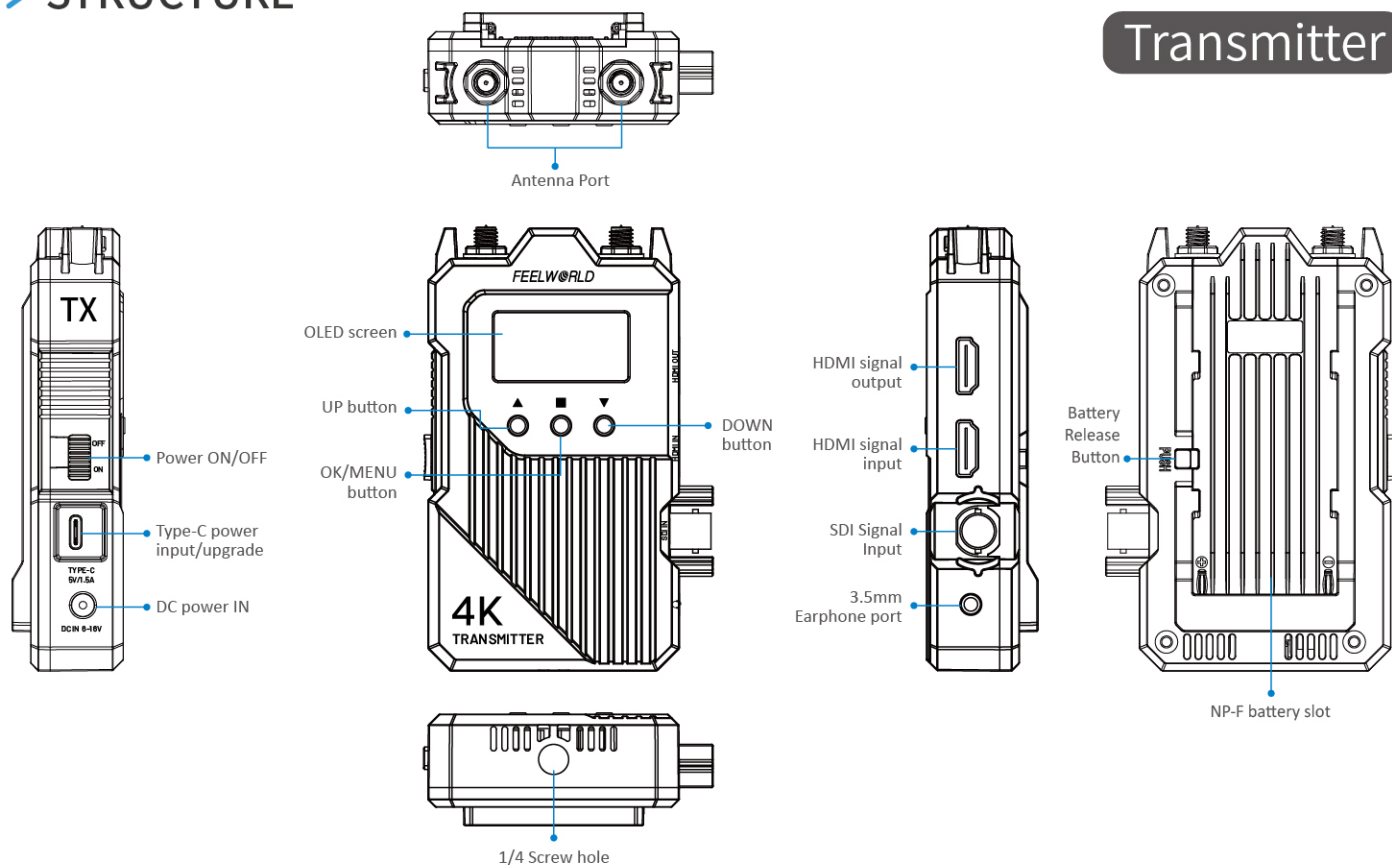

Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2182566

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn