

WV207

USB STREAMING WEBCAM




Makes Vertical Video, Efficient Engage with Your Audience

FHD
1080PUSB
Plug and PlayDistortion-less
Lens2.07M
Effective PixelsSupport
EPTZ85° Wide
Viewing AngleBuilt-in
audio Pickup

>> KEY FEATURES

- High quality sensor, resolution is up to 1920x1080 with frame rate up to 30fps
- USB2.0 easy plug and play, power and upgrade support
- Multiple video encoding H.264, H.265, MJPG, YUY2, making video playback smoother
- Vertical or horizontal screen, select freely
- Built-in audio pickup, clear and natural stereo sound effect, no need for external pickup equipment
- 85°viewing angle without distortion lens
- Multiple mounting options

>> STRUCTURE

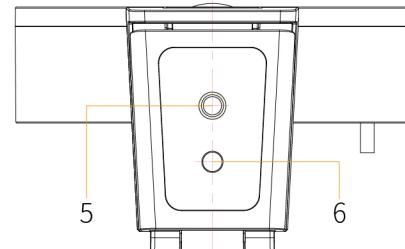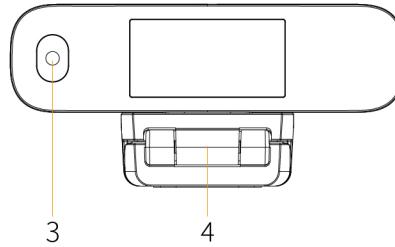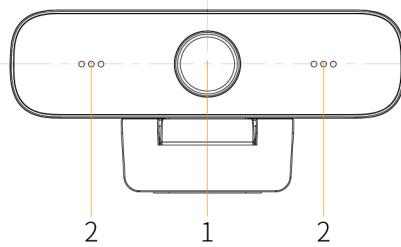

1. Camera Lens(fixed)	3. USB2.0 Cable Outlet Hole(no plug)	5.Screw Hole for Tripod
2. Audio IN(built in pick-up)	4.Fixation Clamp	6.Screw Hole for Bracket

>> PARAMETERS

Description	HD Streaming Webcam	
Model No.	WV207	
Camera Lens	Image Sensor	high quality CMOS sensor
	Effective Pixels	16:9, 2.07 megapixel
	Video Signal	1080x1920@30ps/2ps;1920x1080@30ps/25ps;1600x896@30ps/25ps;720x1280@30fps/25fps;1280x720@fps@30fps/25fps;1024x576@30fps/25fps;960x540@30fps/25fps;800x600@30fps/25fps;800x448@30fps/25fps;720x576@30fps/25fps;720x480@30fps/25fps;640x480@30fps/25fps;640x360@30fps/25fps;480x270@30fps/25fps;320x240@30fps/25fps;352x288@30fps/25fps;320x180@30fps/25fps etc.
	Digital Zoom	3X
	Viewing Angle	92° (D) /52° (H) /85° (V)
	Focus Length	3.24mm
	Minimum Illumination	0.5Lux(F1.8, AGC ON)
	Focus	Manual
	AF	Fixed
	Backlight Contrast	On/Off
	Exposure	Exposure parameters can be adjusted, support auto exposure
Interface Parameter	Video Adjustment	Brightness, Definition, Saturation, Contrast, White Balance Mode, Gain, Antiflicker, Low brightness compensation, etc.
	SNR	>50dB
	Video Output	USB2.0 (support power supply and upgrade)
	Video Compression Format	MJPEG, YUY2, H.264, H.265
	Audio Input	Built-in high sensitive audio pickup
Other Parameter	USB Communication Protocol	UVC, UAC
	PTZ Control	Supports EPTZ
	Input Voltage	5V
	Power Current	500mA (Max.)
	Power Consumption	2.5W(Max.)
	Storage Temperature	-10°C~+60°C
	Storage Humidity	20%~90%
	Working Temperature	-10°C~+50°C
	Working Humidity	20%~80%
	Dimension	102mm×47mm×30mm
Other Parameter	Unit Weight	0.15kg
	Environment	Indoor

>> PACKING LIST

	
Camera	User Manual



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2672627

Fax: +86-596-2672617

Website: www.feelworld.com.cn

www.seetec.com.cn